


POSIThread

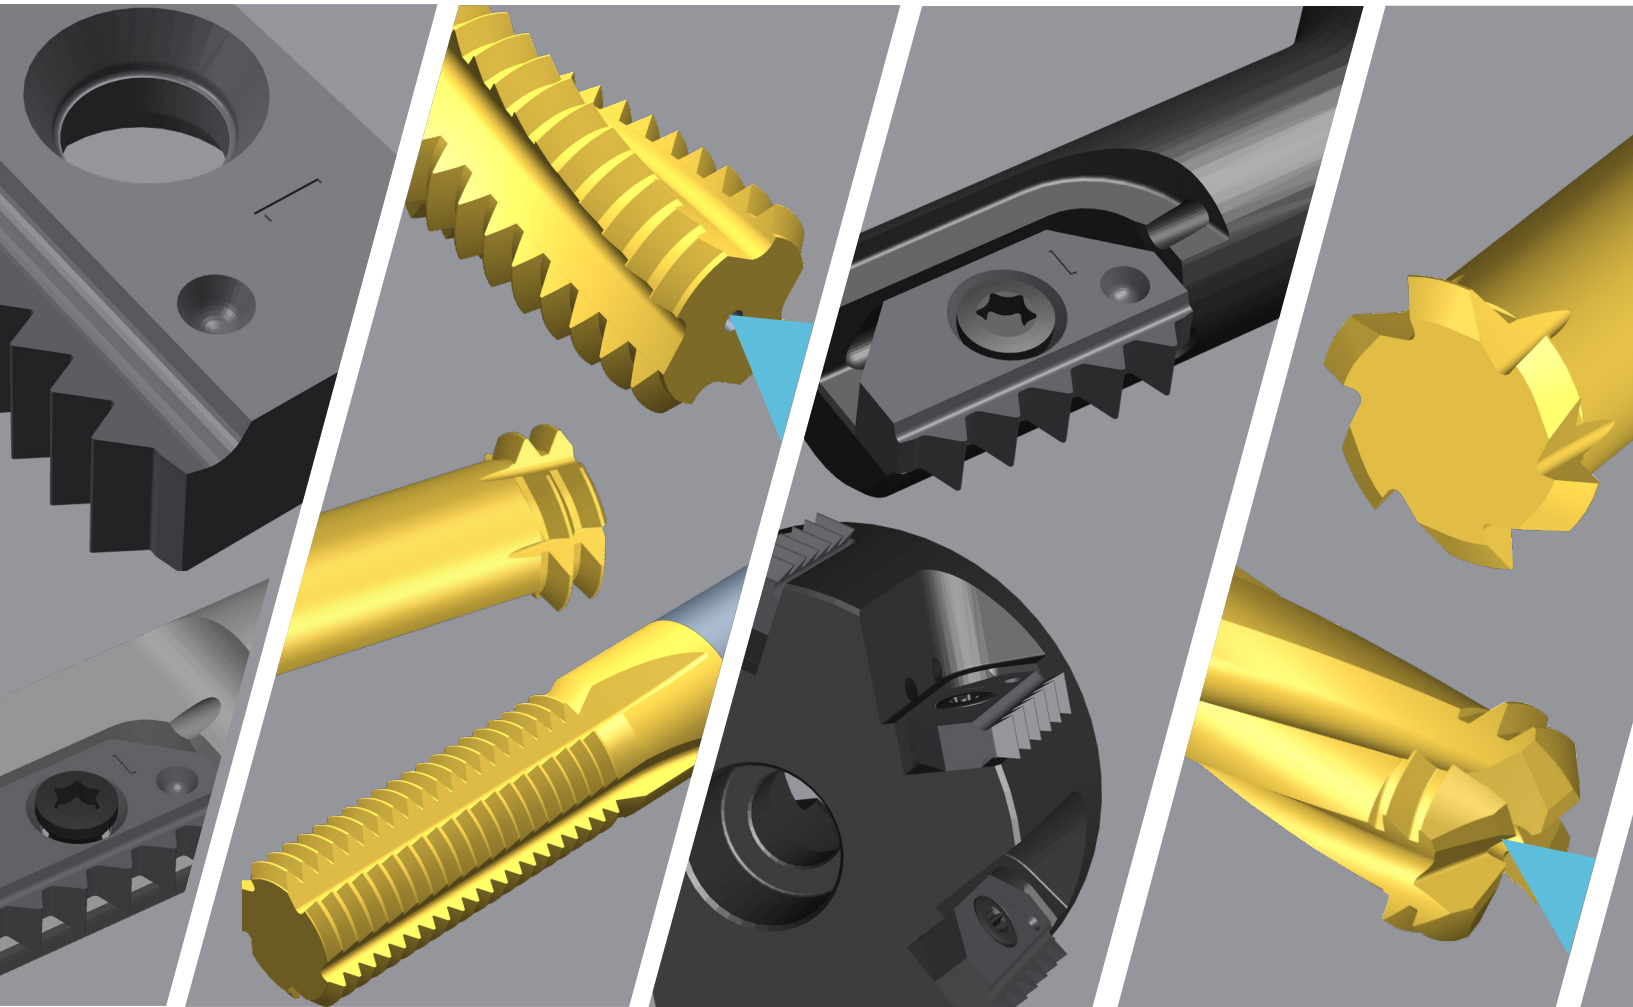

THREAD MILLING

TOOLING FOR OIL & GAS ▪ AUTOMOTIVE ▪ AEROSPACE ▪ GENERAL ENGINEERING


HELICAL FLUTE THREAD MILLS 	TMRN-C TMRNN-C TMRN TMRE	5
STRAIGHT FLUTE THREAD MILLS 	TMSX TMSE TMSN	14
DEEP THREAD MILLS 	PMRN 1T	18
PIXI MILLS MINI THREAD MILLS 	PMRN 3T	20
PIXIHD MINI THREAD MILLS <i>FOR MATERIALS UP TO 62HRC</i> 	PMRN 2TL	24
DRILL - THREAD MILL - CHAMFER 	TMDN	26
INDEXABLE THREAD MILLS 	PTM INSERTS TIMR TOOLING	28
TECHNICAL	RECOMMENDED CUTTING SPEEDS	40

POSIThread

HELICAL FLUTE THREAD MILLS



THREAD MILL IDENTIFICATION CODE

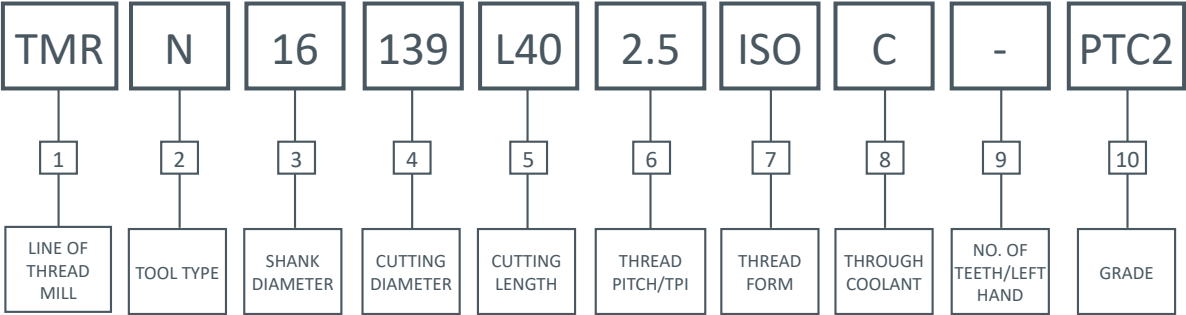

1 LINE OF THREAD MILL		2 TOOL TYPE		3 SHANK DIAMETER		4 CUTTING DIAMETER		5 CUTTING LENGTH	
TMR	HELICAL FLUTE	E	EXTERNAL THREAD	04	4.00 mm	139	13.90 mm	L40	40.00 mm
TMRN	HELICAL FLUTE WITH NECK RELIEF	N	INTERNAL THREAD	06	6.00 mm				
TMD	DRILL-THREADMILL-CHAMFER	X	EXTERNAL & INTERNAL THREAD	08	8.00 mm				
TMS	STRAIGHT FLUTE			10	10.00 mm				
PMS	STRAIGHT FLUTE			12	12.00 mm				
PMR	HELICAL FLUTE			14	14.00 mm				
				16	16.00 mm				
				18	18.00 mm				
				20	20.00 mm				

6 THREAD PITCH/TPI		7 THREAD FORM		8 THROUGH HOLE COOLANT		9 NUMBER OF TEETH/LEFT HAND	
2.5	2.5 mm PITCH	ISO	ISO	C	WITH THROUGH HOLE COOLANT	1T	1 TOOTH
10	10 TPI	UNC	UNIFIED COARSE			2T	2 TOOTH
		UNF	UNIFIED FINE			2TL	2 TOOTH LEFT HAND CUTTING
		UNEF	UNIFIED EXTRA FINE			3T	3 TOOTH
		BSW	BRITISH STANDARD WHITWORTH				
		BSF	BRITISH STANDARD FINE				
		BSP	BRITISH STANDARD PIPE				
		BSPT	BRITISH STANDARD PIPE TAPER				
		NPT	NATIONAL PIPE THREAD				
		NPTF	NATIONAL PIPE THREAD FUEL				
		ACME	GENERAL PURPOSE ACME				



10 COATING GRADE	
PTC2 TiN	HELICAL, DEEP THREADING, PIXIMILL, PIXIHD, TMDN, STRAIGHT

ISO

HELICAL FLUTES THRU-HOLE COOLANT

DIN13 60° INCLUSIVE

INTERNAL

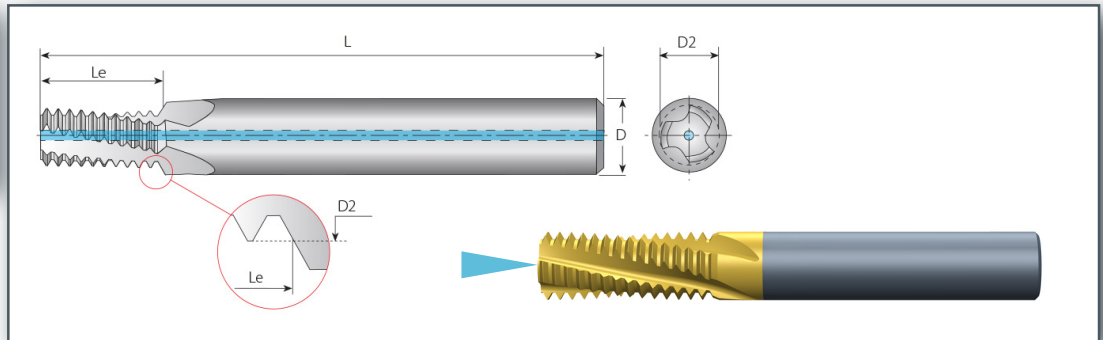

1.5 x Ø (Le ≤ 1.5 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	Le	Z	Zt	mm
M8x1.25	-	1.25	TMRN 08 065 L13 1.25ISO-C	8	6.50	61	13.13	3	10	6.80
M10x1.5	M12-M48x1.5	1.50	TMRN 10 082 L15 1.5ISO-C	10	8.20	73	15.70	3	10	8.50
M12x1.75	-	1.75	TMRN 10 099 L18 1.75ISO-C	10	9.90	73	18.38	4	10	10.20

2.0 x Ø (Le ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	Le	Z	Zt	mm
M3x0.5	M3.5-M16x0.5	0.50	TMRN 04 024 L06 0.5ISO-C	4	2.40	45	6.20	3	12	2.50
M4x0.7	-	0.70	TMRN 04 031 L08 0.7ISO-C	4	3.15	45	8.70	3	12	3.30
-	M6x0.75	0.75	TMRN 06 050 L12 0.75ISO-C	6	5.00	57	12.40	3	16	5.30
M5x0.8	-	0.80	TMRN 04 039 L10 0.8ISO-C	4	3.90	45	10.80	3	13	4.20
M6x1.0	M8-M40x1.0	1.00	TMRN 06 048 L12 1.0ISO-C	6	4.80	57	12.50	3	12	5.00
-	M8x1.0	1.00	TMRN 08 067 L16 1.0ISO-C	8	6.70	61	16.50	3	16	7.00
-	M10x1.0	1.00	TMRN 10 087 L20 1.0ISO-C	10	8.70	73	20.50	3	20	9.00
-	M12x1.0	1.00	TMRN 12 107 L24 1.0ISO-C	12	10.70	73	24.50	4	24	11.00
M8x1.25	-	1.25	TMRN 08 065 L16 1.25ISO-C	8	6.50	61	16.90	3	13	6.80
-	M10x1.25	1.25	TMRN 10 085 L20 1.25ISO-C	10	8.50	73	20.60	3	16	8.80
M10x1.5	M12xM48x1.5	1.50	TMRN 10 082 L20 1.5ISO-C	10	8.20	73	20.20	3	13	8.50
-	M12x1.5	1.50	TMRN 10 099 L24 1.5ISO-C	10	9.90	73	24.70	4	16	10.50
-	M16x1.5	1.50	TMRN 14 139 L32 1.5ISO-C	14	13.90	92	32.20	4	21	14.50
M12x1.75	-	1.75	TMRN 10 099 L25 1.75ISO-C	10	9.90	73	25.40	4	14	10.20
M14x2.0	M17-M80x2.0	2.00	TMRN 12 116 L29 2.0ISO-C	12	11.60	80	29.90	4	14	12.00
M16x2.0	M17-M80x2.0	2.00	TMRN 14 136 L33 2.0ISO-C	14	13.60	92	33.00	4	16	14.00
M20x2.5	-	2.50	TMRN 18 171 L41 2.5ISO-C	18	17.10	102	41.20	4	16	17.50
M24x3.0	-	3.00	TMRN 20 199 L49 3.0ISO-C	20	19.90	102	49.50	4	16	21.00

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER


HELICAL

ISO

DIN13 60° INCLUSIVE

HELICAL FLUTES THRU-HOLE COOLANT

INTERNAL

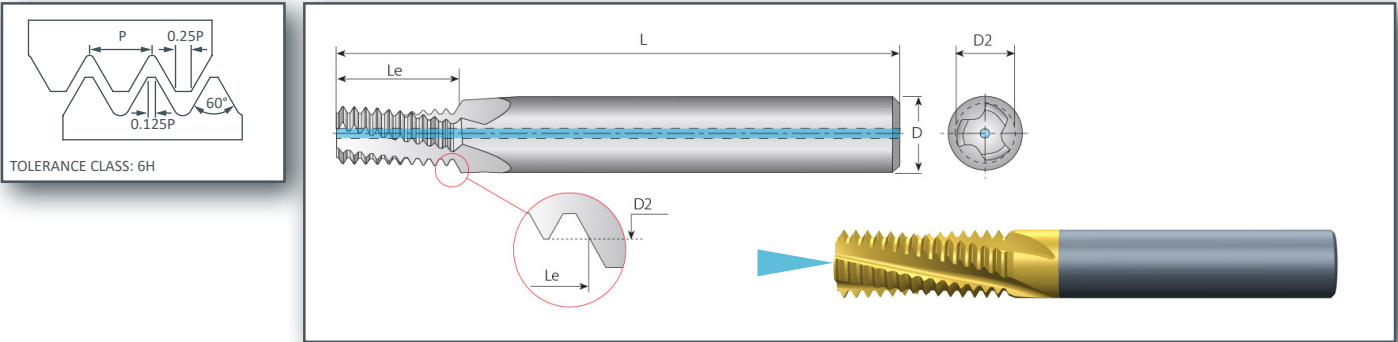

3.0 x Ø (Le ≤ 3.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	Le	Z	Zt	mm
M3x0.5	M3.5-M16x0.5	0.50	TMRN 04 024 L09 0.5ISO-C	4	2.40	45	9.25	3	18	2.50
M4x0.7	-	0.70	TMRN 04 031 L12 0.7ISO-C	4	3.15	47	12.95	3	18	3.30
M5x0.8	-	0.80	TMRN 04 039 L15 0.8ISO-C	4	3.90	50	15.60	3	19	4.20
M6x1.0	M8-M40x1.0	1.00	TMRN 06 048 L18 1.0ISO-C	6	4.80	60	18.50	3	18	5.00
M8x1.25	-	1.25	TMRN 08 065 L25 1.25ISO-C	8	6.50	66	25.63	3	20	6.80
M10x1.5	M12xM48x1.5	1.50	TMRN 10 082 L30 1.5ISO-C	10	8.20	75	30.75	3	20	8.50
M12x1.75	-	1.75	TMRN 10 099 L36 1.75ISO-C	10	9.90	86	37.63	4	21	10.20
M16x2.0	M17-M80x2.0	2.00	TMRN 14 136 L48 2.0ISO-C	14	13.60	108	49.00	4	24	14.00



*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

ISO

HELICAL FLUTES

DIN13 60° INCLUSIVE

INTERNAL

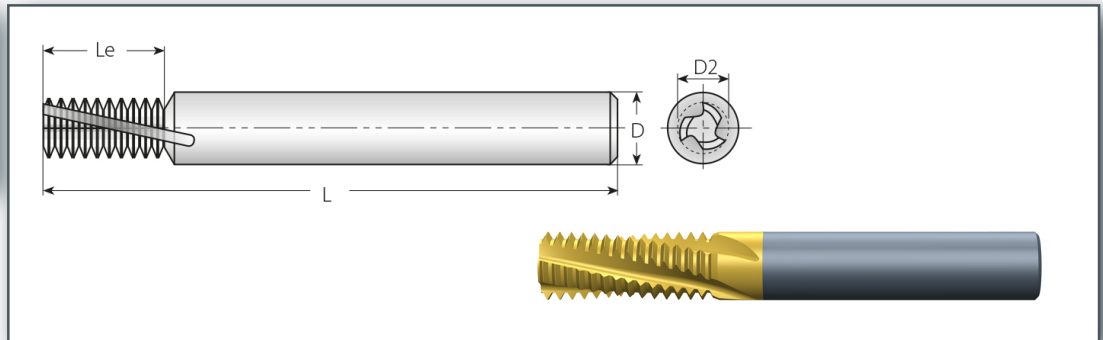

2.0 x Ø (Le ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	Le	Z	Zt	mm
M3x0.5	M3.5-M16x0.5	0.50	TMRN 04 022 L06 0.5ISO	4	2.20	45	6.00	3	12	2.50
-	M5x0.5	0.50	TMRN 04 039 L10 0.5ISO	4	3.90	45	10.00	3	20	4.50
M4x0.7		0.70	TMRN 04 028 L08 0.7ISO	4	2.80	45	8.00	3	12	3.30
	M6x0.75	0.75	TMRN 04 039 L12 0.75ISO	4	3.90	45	12.00	3	16	5.30
M5x0.8		0.80	TMRN 04 035 L10 0.8ISO	4	3.50	45	10.40	3	13	4.20
M6x1.0	M8-M40x1.0	1.00	TMRN 04 039 L12 1.0ISO	4	3.90	45	12.00	3	12	5.00
	M8x1.0	1.00	TMRN 06 059 L16 1.0ISO	6	5.90	57	16.00	3	16	7.00
	M10x1.0	1.00	TMRN 08 079 L20 1.0ISO	8	7.90	63	20.00	3	20	9.00
	M12x1.0	1.00	TMRN 10 099 L24 1.0ISO	10	9.90	73	24.00	3	24	11.00
M8x1.25		1.25	TMRN 06 058 L16 1.25ISO	6	5.80	57	16.25	3	13	6.80
-	M10x1.25	1.25	TMRN 08 077 L20 1.25ISO	8	7.70	63	20.00	3	16	8.80
M10x1.5	M12-M48x1.5	1.50	TMRN 08 077 L21 1.5ISO	8	7.70	63	21.00	3	14	8.50
	M12x1.5	1.50	TMRN 10 094 L24 1.5ISO	10	9.40	73	24.00	4	16	10.50
	M16x1.5	1.50	TMRN 12 119 L33 1.5ISO	12	11.90	83	33.00	4	22	14.50
M12x1.75		1.75	TMRN 10 087 L24 1.75ISO	10	8.70	73	24.50	4	14	10.20
M14x2.0	M17-80x2.0	2.00	TMRN 10 099 L28 2.0ISO	10	9.90	73	28.00	4	14	12.00
M16x2.0	M17-M80x2.0	2.00	TMRN 12 119 L32 2.0ISO	12	11.90	83	32.00	4	16	14.00
M18-M22x2.5		2.50	TMRN 16 139 L40 2.5ISO	16	13.90	92	40.00	5	16	15.50
M24x3.0		3.00	TMRN 16 159 L42 3.0ISO	16	15.90	92	42.00	4	14	21.00

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER


HELICAL

ISO

HELICAL FLUTES

DIN13 60° INCLUSIVE

EXTERNAL

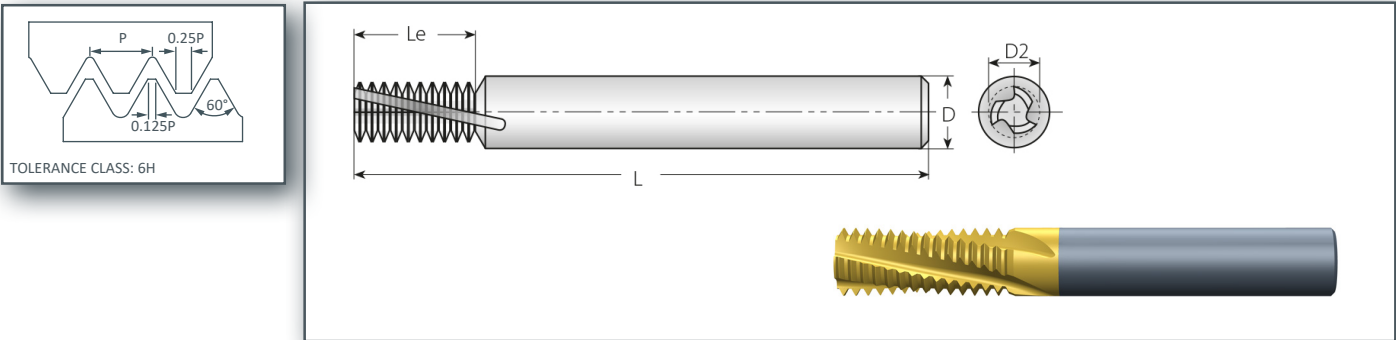

HELICAL

3.0 x Ø (Le ≤ 3.0 x Thread Diameter)


THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH
M COARSE	M FINE	mm		D	D2	L	Le	Z	Zt
M6x1.0	-	1.00	TMRE 04 039 L12 1.0ISO	4	3.90	45	12	3	12
M10x1.5	-	1.50	TMRE 08 079 L21 1.5ISO	8	7.90	63	21	3	14

ISO

HELICAL FLUTES WITH RELIEF NECK THRU-HOLE COOLANT

DIN13 60° INCLUSIVE

INTERNAL

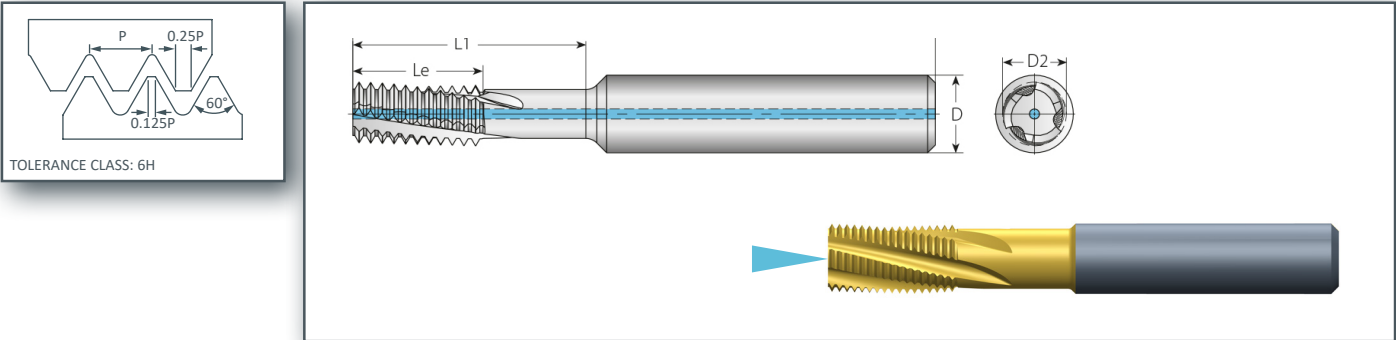

THRU-HOLE COOLANT

3.0 x Ø (Le ≤ 3.0 x Thread Diameter)


THREAD		PITCH	DESCRIPTION	DIMENSIONS mm					NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	Le	L1	Z	Zt	mm
M6x1.0	M8-M40x1.0	1.00	TMRNN 06 048 L18 1.0ISO-C	6	4.80	60	10.00	18	3	10	5.00
M8x1.25	-	1.25	TMRNN 08 065 L24 1.25ISO-C	8	6.50	66	13.75	24	3	11	6.80
M10x1.5	M12-M48x1.5	1.50	TMRNN 10 082 L30 1.5ISO-C	10	8.20	75	16.50	30	3	11	8.50

UNIFIED

ASME/ANSI B1.1:74 - 60° INCLUSIVE

HELICAL FLUTES THRU-HOLE COOLANT

INTERNAL

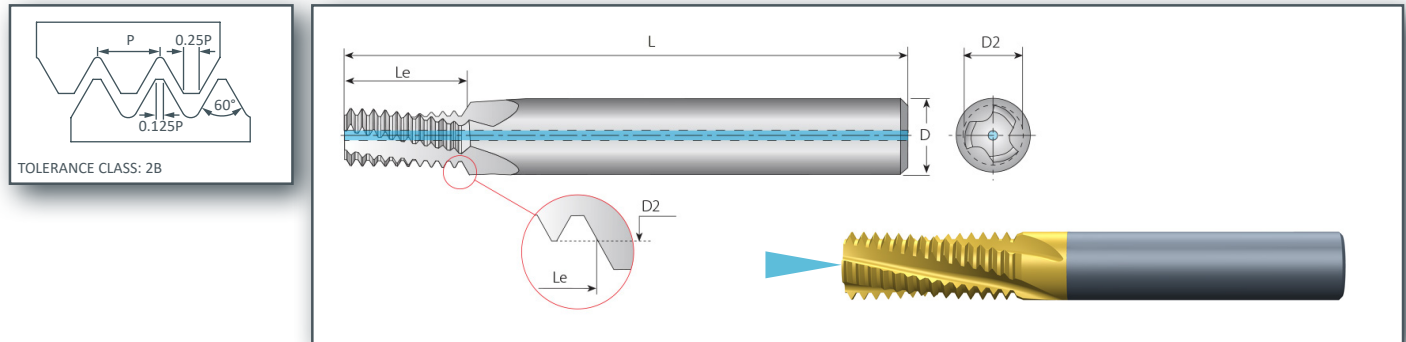

2.0 x Ø (Le ≤ 2.0 x Thread Diameter)


THREAD				PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNC	UNF	UNEF	TPI			D	D2	L	Le	Z	Zt	mm
-	No.10-32	No.12-3/8"x32	32		TMRN 04 038 L9 32UNF-C	4	3.80	45	9.93	3	12	4.00
1/4"x20	7/16", 1/2"x20	3/4"-1"x20	20		TMRN 06 048 L13 20UNC-C	6	4.88	57	13.34	3	10	5.20
3/8"x16	3/4"x16	-	16		TMRN 08 076 L19 16UNC-C	8	7.65	61	19.85	3	12	8.00
3/4"x10	-	-	10		TMRN 16 159 L39 10UNC-C	16	15.90	92	39.37	4	15	16.50

UNIFIED

ASME/ANSI B1.1:74 - 60° INCLUSIVE

HELICAL FLUTES

INTERNAL

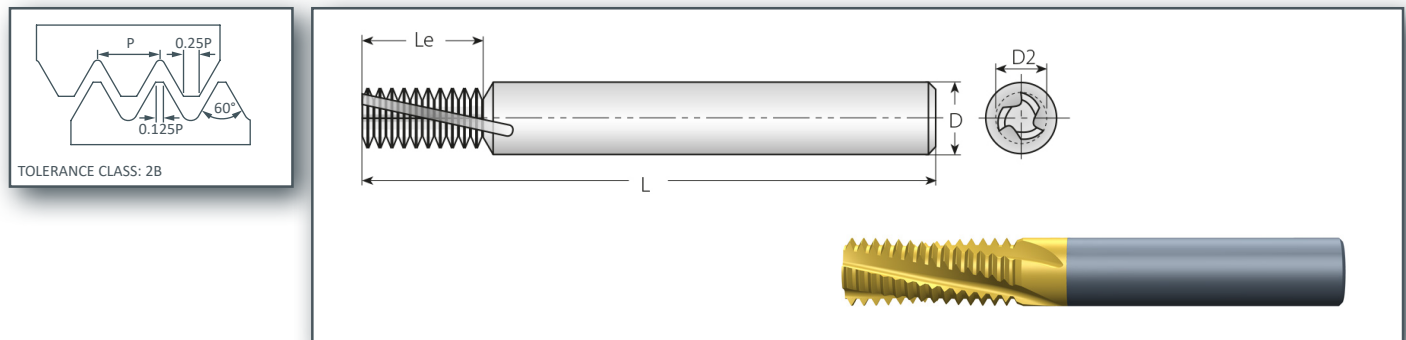

2.0 x Ø (Le ≤ 2.0 x Thread Diameter)


THREAD				PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNC	UNF	UNEF	TPI			D	D2	L	Le	Z	Zt	mm
-	1/4"x28	7/16", 1/2"x28	28		TMRN 06 046 L13 28UNF	6	4.60	57	12.70	3	14	5.50
-	7/16", 1/2"x20	3/4"-1"x20	20		TMRN 10 085 L23 20UNF	10	8.50	73	22.90	4	18	9.80
3/8"x16	3/4"x16	-	16		TMRN 08 067 L19 16UNC	8	6.70	63	19.10	3	12	8.00
-	7/8"x14	-	14		TMRN 16 159 L40 14UNF	16	15.90	100	39.30	4	22	18.00
5/8"x11	-	-	11		TMRN 12 110 L32 11UNC	12	11.00	83	32.30	4	14	13.50
1"x8	-	-	8		TMRN 20 170 L51 8UNC	20	17.0	104	50.80	4	16	22.00

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

HELICAL

BSP (G)
BS2779:1956 - 55° INCLUSIVE


HELICAL FLUTES THRU-HOLE COOLANT
EXTERNAL ~~X~~ INTERNAL

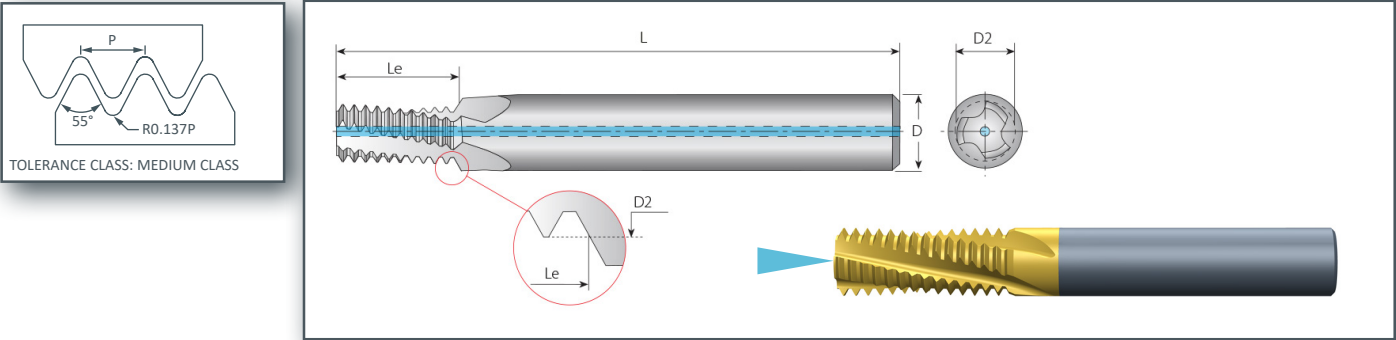

THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
STANDARD	TPI		D	D2	L	Le	Z	Zt	mm
1/4", 3/8"x19	19	TMRX 12 110 L27 19BSP-C	12	11.00	80	27.41	4	20	11.80
1/2"-7/8"x14	14	TMRX 18 179 L42 14BSP-C	18	17.90	102	42.63	4	23	19.00

BSP (G)
BS2779:1956 - 55° INCLUSIVE

HELICAL FLUTES
EXTERNAL ~~X~~ INTERNAL

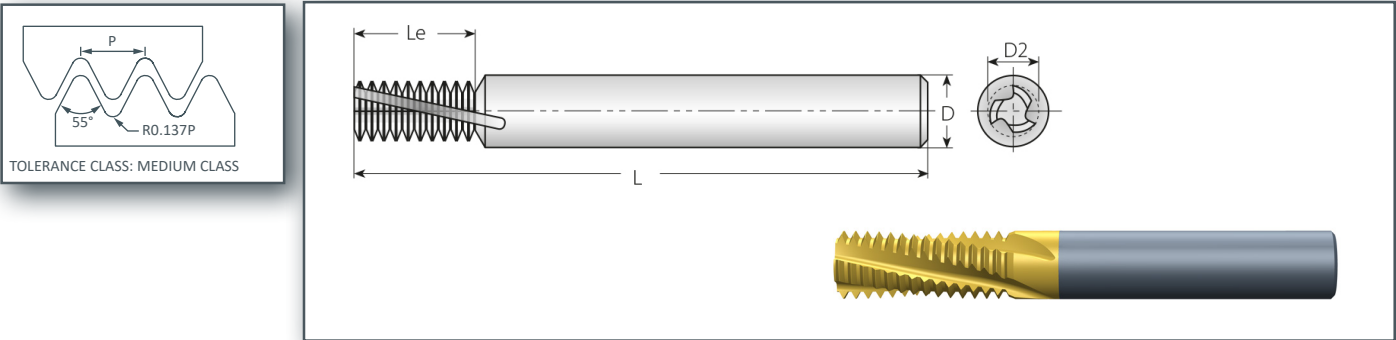



THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
STANDARD	TPI		D	D2	L	Le	Z	Zt	mm
1/8"x28	28	TMRX 08 077 L20 28BSP	8	7.70	63	20.00	3	22.00	8.70
1/2"x19, 3/8"x19	19	TMRX 10 099 L27 19BSP	10	9.90	73	26.70	4	19.00	11.80
1/2", 3/4"x14	14	TMRX 16 157 L44 14BSP	16	15.70	92	43.50	5	23.00	19.00
1", 1 1/2", 2", 2 1/2"x11	11	TMRX 20 199 L42 11BSP	20	19.90	104	41.60	5	18.00	30.70

NPT

HELICAL FLUTES THRU-HOLE COOLANT

ASME/ANSI B1.20.1 60° INCLUSIVE 1/16 TAPER

EXTERNAL ~~X~~ INTERNAL

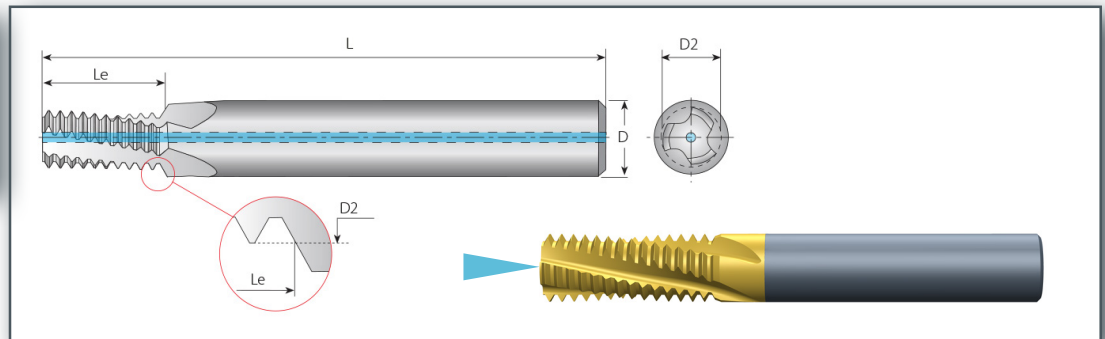

THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
STANDARD	TPI		D	D2	L	Le	Z	Zt	mm
1/16"x27	27	TMRX 06 059 L09 27NPT-C	6	5.90	57	9.90	3	10	6.30
1/8"x27	27	TMRX 08 076 L09 27NPT-C	8	.65	61	9.90	3	10	8.50
1/4"x18	18	TMRX 10 099 L14 18NPT-C	10	9.90	73	14.80	3	10	11.10
3/8"x18	18	TMRX 12 112 L14 18NPT-C	12	11.15	73	14.80	4	10	14.50
1/2", 3/4"x14	14	TMRX 16 142 L19 14NPT-C	16	14.25	92	19.00	4	10	17.7, 23.0
1", 1 1/4", 1 1/2", 2"x11.5	11.5	TMRX 20 196 L23 11.5NPT-C	20	19.60	102	23.20	4	10	29.0, 37.7, 44.0, 56.0
2 1/2", 3"x8	8	TMRX 20 196 L33 8NPT-C	20	19.60	102	33.30	4	10	66.5, 82.1

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER


HELICAL

NPT

ASME/ANSI B1.20.1 60° INCLUSIVE 1/16 TAPER

HELICAL FLUTES

EXTERNAL ~~X~~ INTERNAL

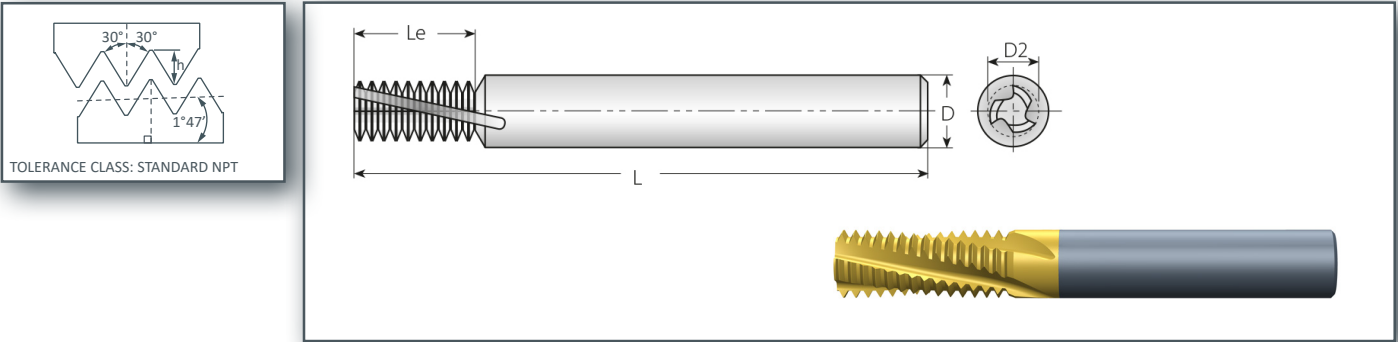


THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
STANDARD	TPI		D	D2	L	Le	Z	Zt	mm
1/16"x27	27	TMRX 06 053 L09 27NPT	6	5.30	57	9.40	3	10	6.30
1/8"x27	27	TMRX 08 075 L09 27NPT	8	7.50	63	9.40	4	10	8.50
1/4"x18	18	TMRX 10 094 L14 18NPT	10	9.40	73	14.10	4	10	11.10
3/8"x18	18	TMRX 12 119 L14 18NPT	12	11.90	83	14.10	4	10	14.50
1/2", 3/4"x14	14	TMRX 12 119 L20 14NPT	12	11.90	84	20.00	4	11	17.7, 23.0
1/2", 3/4"x14	14	TMRX 16 155 L25 14NPT	16	15.50	92	25.40	5	14	17.7, 23.0
1", 1 1/4", 1 1/2", 2"x11.5	11.5	TMRX 20 199 L33 11.5NPT	20	19.90	104	33.10	5	15	29.0-56.0
2 1/2", 3"x8	8	TMRX 20 199 L38 8NPT	20	19.90	104	38.10	4	12	66.50

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

POSIThread

STRAIGHT FLUTE THREAD MILLS

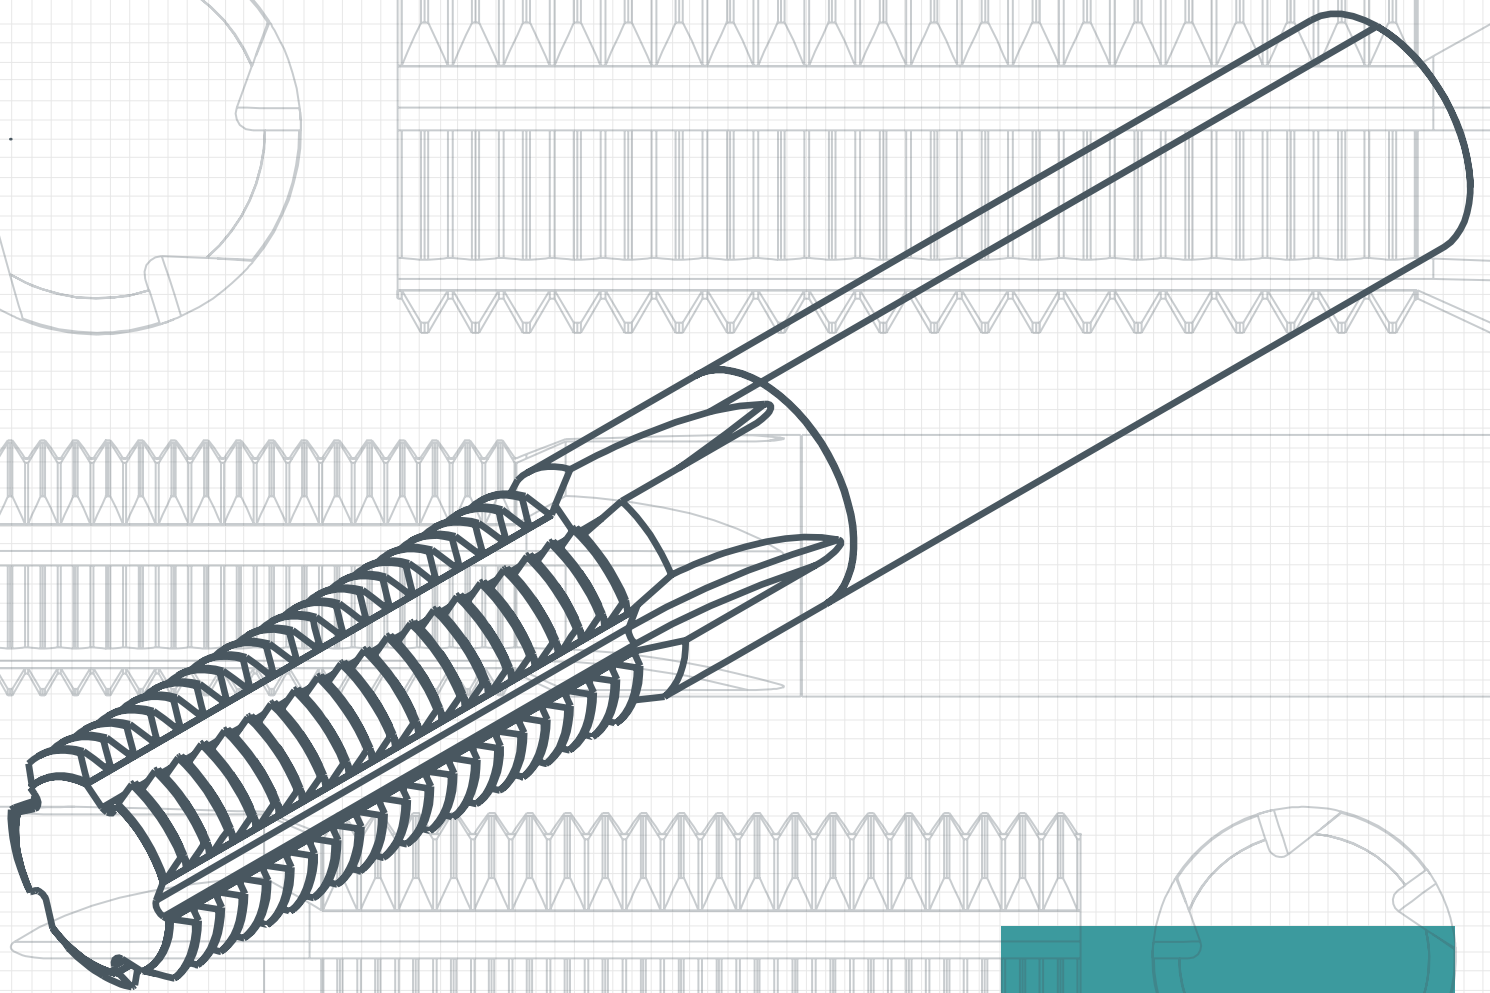

TMSX
TMSE
TMSN



STRAIGHT

ISO

DIN13 60° INCLUSIVE

STRAIGHT FLUTES

EXTERNAL

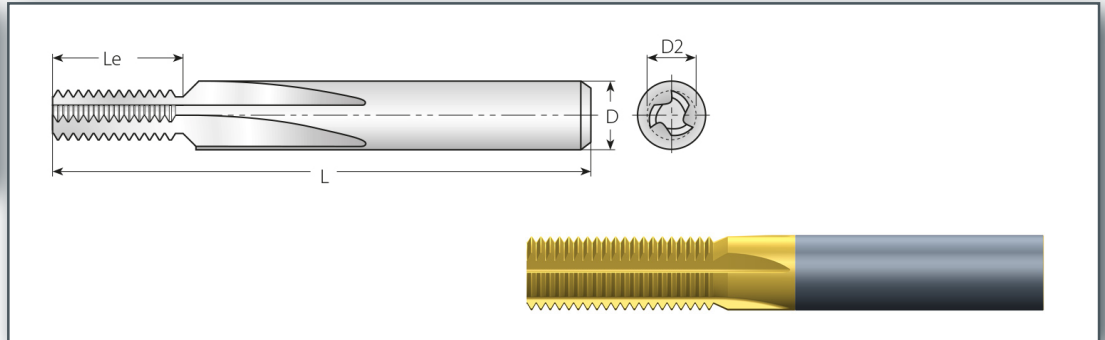



THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	
MIN DIA.	mm		D	D2	L	Le	Z	Zt	h mm
M4.5	0.75	TMSE 08 079 L19 0.75ISO	8	7.9	63	19.5	3	26	0.46
M6	1.00	TMSE 10 099 L24 1.0ISO	10	9.9	72	24	5	24	0.61

ISO

DIN13 60° INCLUSIVE

STRAIGHT FLUTES

INTERNAL

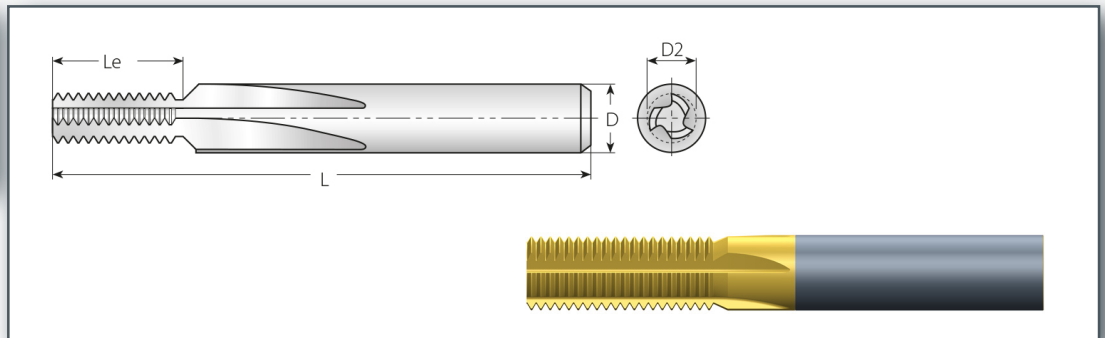



THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	
MIN DIA.	mm		D	D2	L	Le	Z	Zt	h mm
M8	0.75	TMSN 06 059 L15 0.75ISO	6	5.9	57	15	3	20	0.43
M16	1.50	TMSN 10 099 L24 1.5ISO	10	9.9	72	24	5	16	0.87
M18	1.50	TMSN 12 119 L30 1.5ISO	12	11.9	83	30	5	20	0.87

NPT

ASME/ANSI B1.20.1 60° INCLUSIVE 1/16 TAPER

STRAIGHT FLUTES

EXTERNAL ~~X~~ INTERNAL

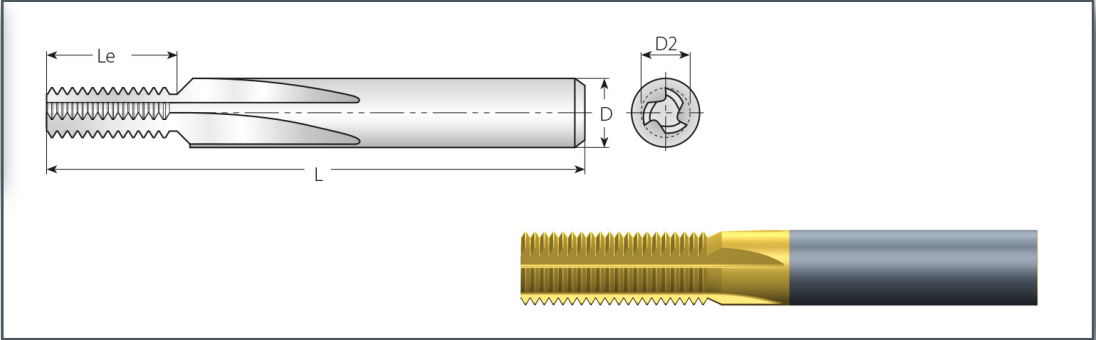



THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	
MIN DIA.	TPI		D	D2	L	Le	Z	Zt	h mm
1/4"	18	TMSX 08 079 L14 18NPT	8	7.90	63	14.11	3	10	1.01
1/2"	14	TMSX 12 119 L20 14NPT	12	11.90	83	19.96	5	11	1.33

BSP (G)

BS2779:1956 - 55° INCLUSIVE

STRAIGHT FLUTES

EXTERNAL ~~X~~ INTERNAL

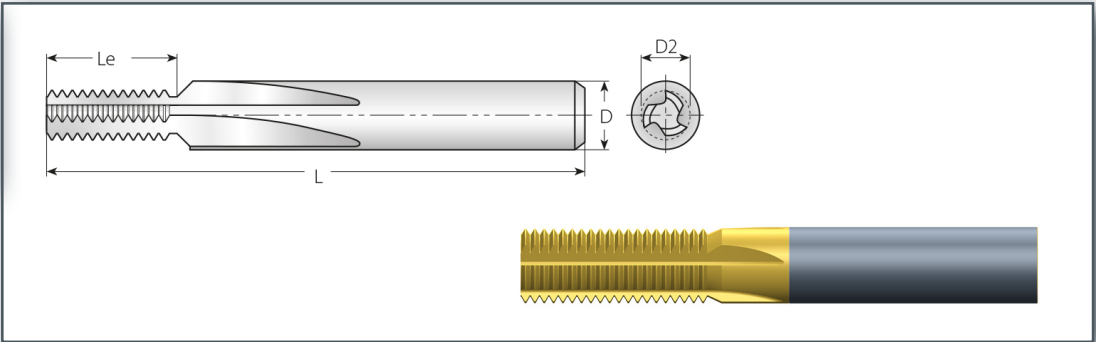

THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	
MIN DIA.	TPI		D	D2	L	Le	Z	Zt	h mm
1/4"	19	TMSX 08 079 L19 19BSP PTC2	8	7.90	63	18.72	5	14	0.86
1/2"	14	TMSX 12 119 L29 14BSP PTC2	12	11.90	83	29.03	5	16	1.16



STRAIGHT

BSP (G)

BS2779:1956 - 55° INCLUSIVE

STRAIGHT FLUTES


EXTERNAL ~~X~~ INTERNAL

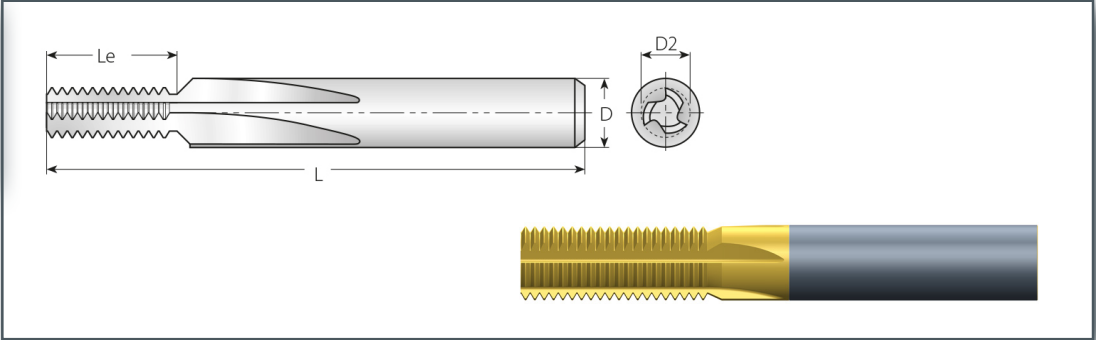

THREAD	PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	
MIN DIA.	TPI		D	D2	L	Le	Z	Zt	h mm
1/4"	19	TMSX 08 079 L19 19BSP PTC2	8	7.90	63	18.72	5	14	0.86
1/2"	14	TMSX 12 119 L29 14BSP PTC2	12	11.90	83	29.03	5	16	1.16

POSIThread

DEEP THREAD MILLS

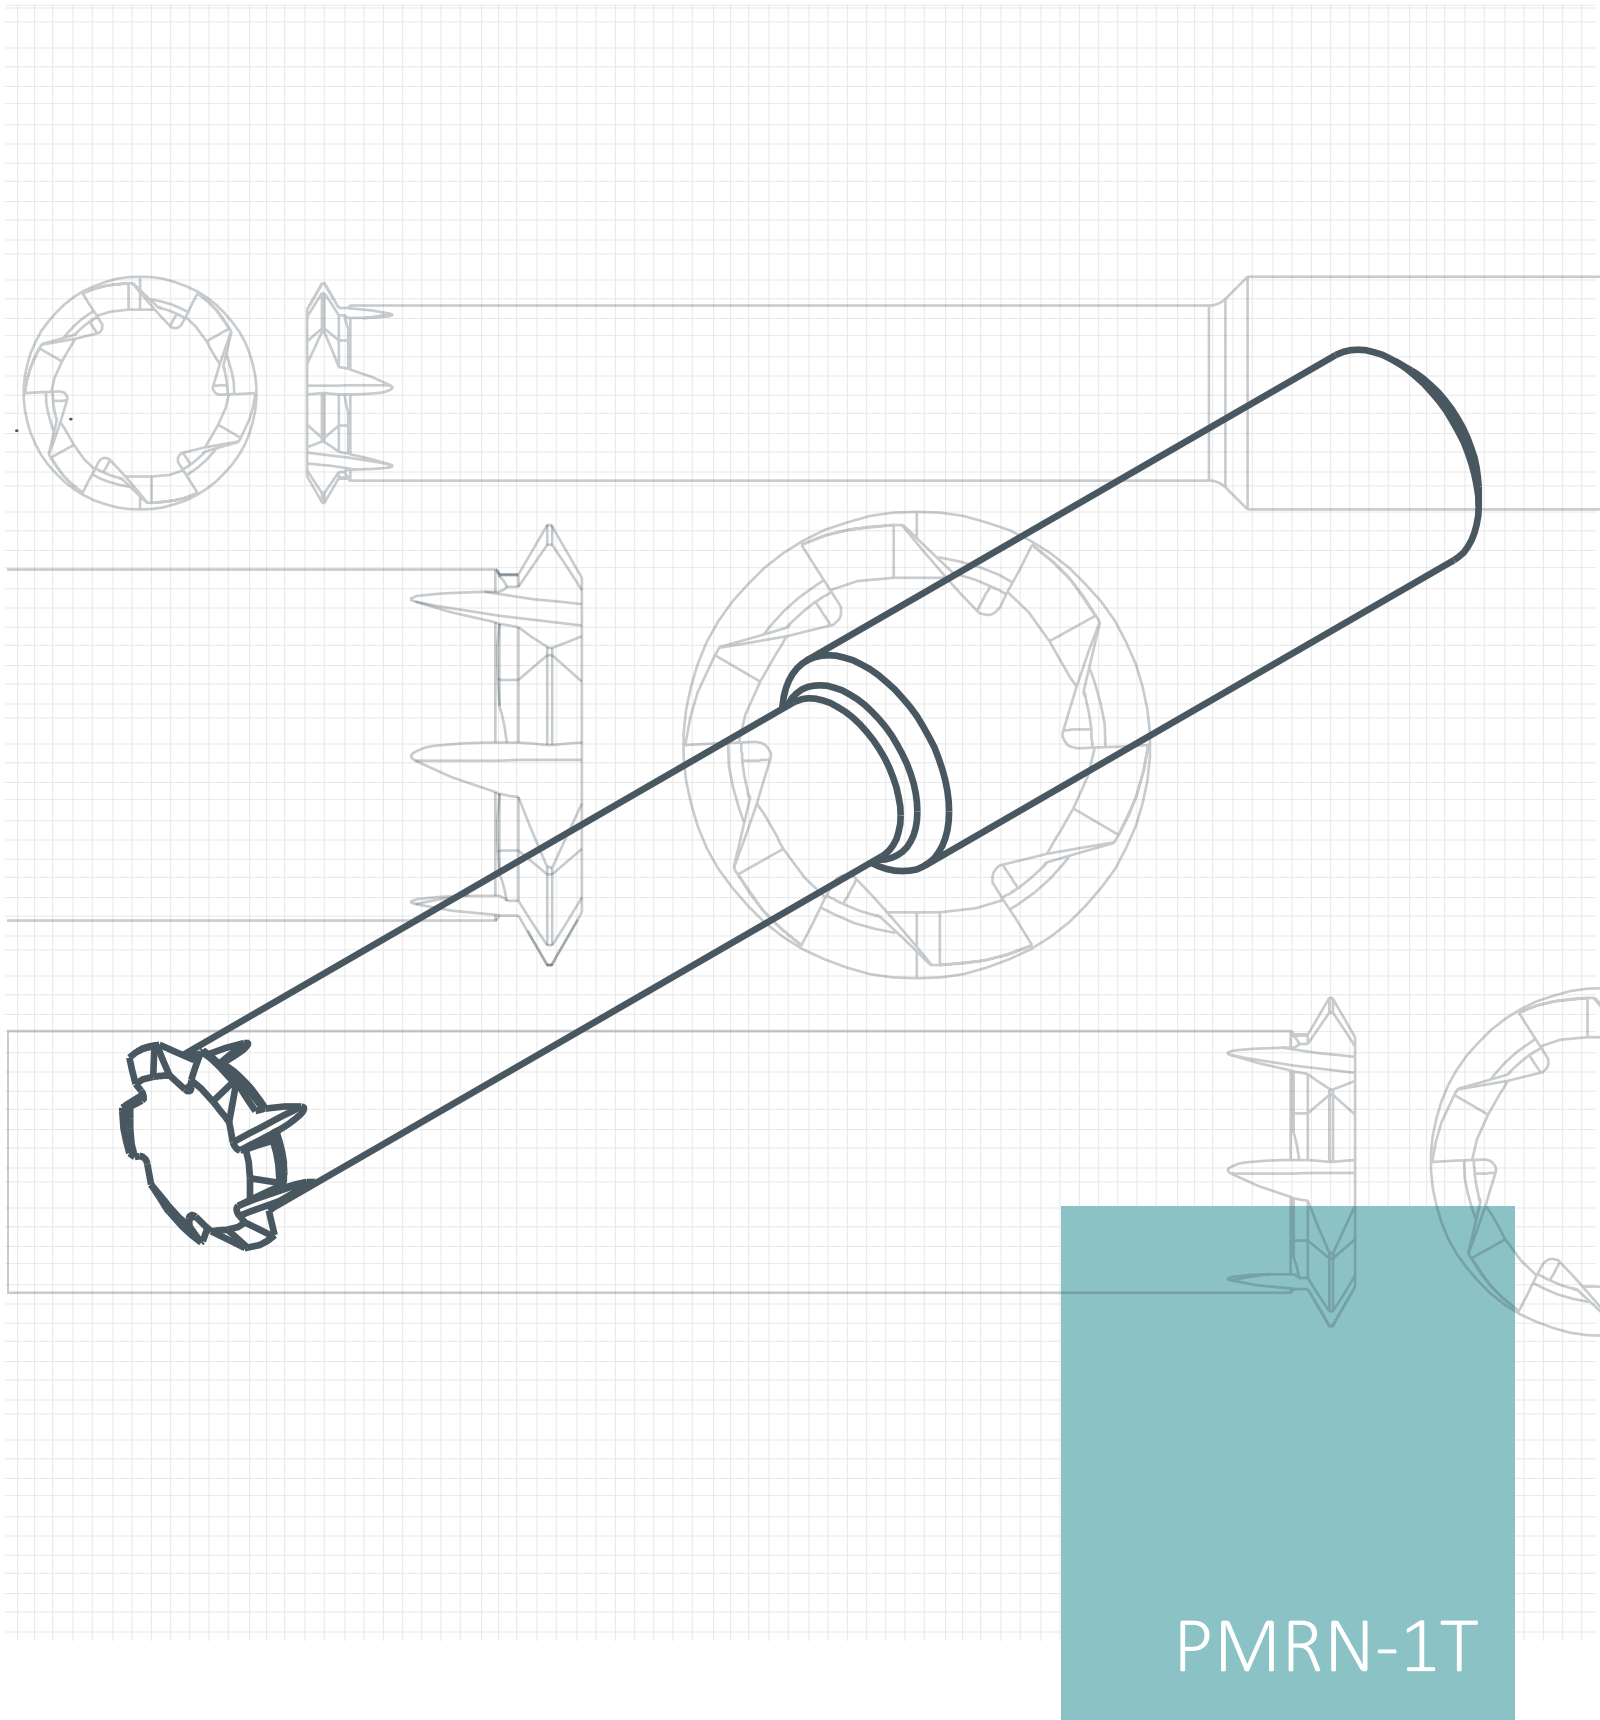

PMRN-1T



DEEP THREADING

ISO

DIN13 60° INCLUSIVE

LONG REACH TOOLS

INTERNAL

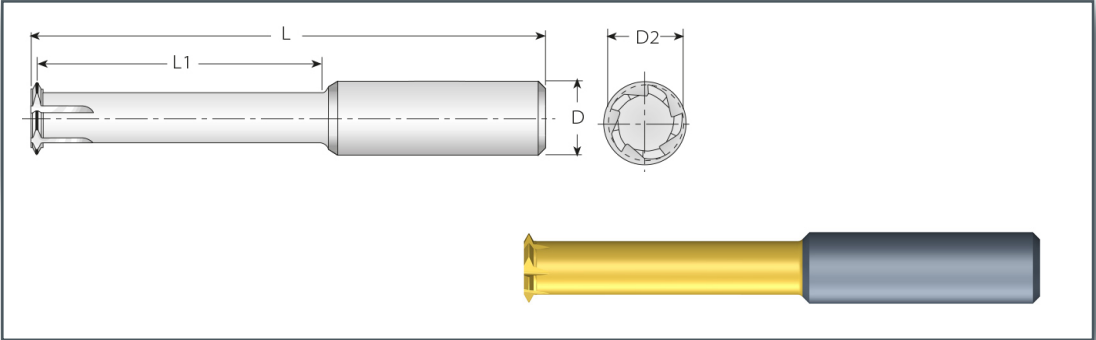

3.0 x Ø (L1 ≤ 3.0 x Thread Diameter)


THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE		mm		D	D2	L	L1	Z	Zt	mm
M6x1.0		1.00	PMRN 08 041 L19 1.0ISO 1T	8	4.1	63	19	3	1	5
M8x1.25		1.25	PMRN 10 058 L26 1.25ISO 1T	10	5.8	73	26	3	1	6.8
M10x1.5		1.50	PMRN 10 077 L32 1.5ISO 1T	10	7.7	73	32	3	1	8.5
M12x1.75		1.75	PMRN 12 087 L38 1.75ISO 1T	12	8.7	83	38	4	1	10.2

PARTIAL PROFILE

60° INCLUSIVE

LONG REACH TOOLS

INTERNAL




THREAD			PITCH		DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH
M COARSE	M FINE	UN, UNS, UNF, UNEF	mm	TPI		D	D2	L	L1	Z	Zt
M5x0.8	M5x0.5 M5x0.75	No.10-56UNS, No.10-48UNS, No.10-40UNS, No.10-36UNS, No.10-32UNF	0.5-0.8	32-56	PMRN 04 039 L16 A60 1T	4	3.9	45	16	4	1
M6x1.0	M6x0.5, M6x0.75	No.12-56UNS, No.12-48UNS, 1/4-40UNS, 1/4-36UNS, 1/4-32UNEF, 1/4-28UNF, 1/4-27UNS, 1/4-24UNS	0.5-1.0	24-56	PMRN 06 049 L20 B60 1T	6	4.85	51	20	5	1
M8x1.25	M7x0.5, M7x0.75, M7.5x1.0	5/16-48UNS, 5/16-40UNS, 5/16-36UNS, 5/16-32UNEF, 5/16-28UN, 5/16-27UNS, 5/16-24UNS, 5/16-20UN	0.5-1.25	20-48	PMRN 06 059 L25 F60 1T	6	5.9	64	25	5	1
M10x1.5	M10x1.0, M10x1.25	3/8-24UNF, 3/8-20UN, 7/16-18UNS, 7/16-16UN	1.0-1.50	16-24	PMRN 08 079 L32 C60 1T	8	7.9	63	32	6	1
M12x1.75	M12x1.0, M12x1.25, M12x1.5	1/2-24UNS, 1/2-20UNS, 1/2-18UNS, 1/2-16UNS, 1/2-14UNS	1.0-1.75	14-24	PMRN 10 099 L38 D60 1T	10	9.9	73	38	6	1



*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

POSIThread

PIXIMILLS MINI THREAD MILLS

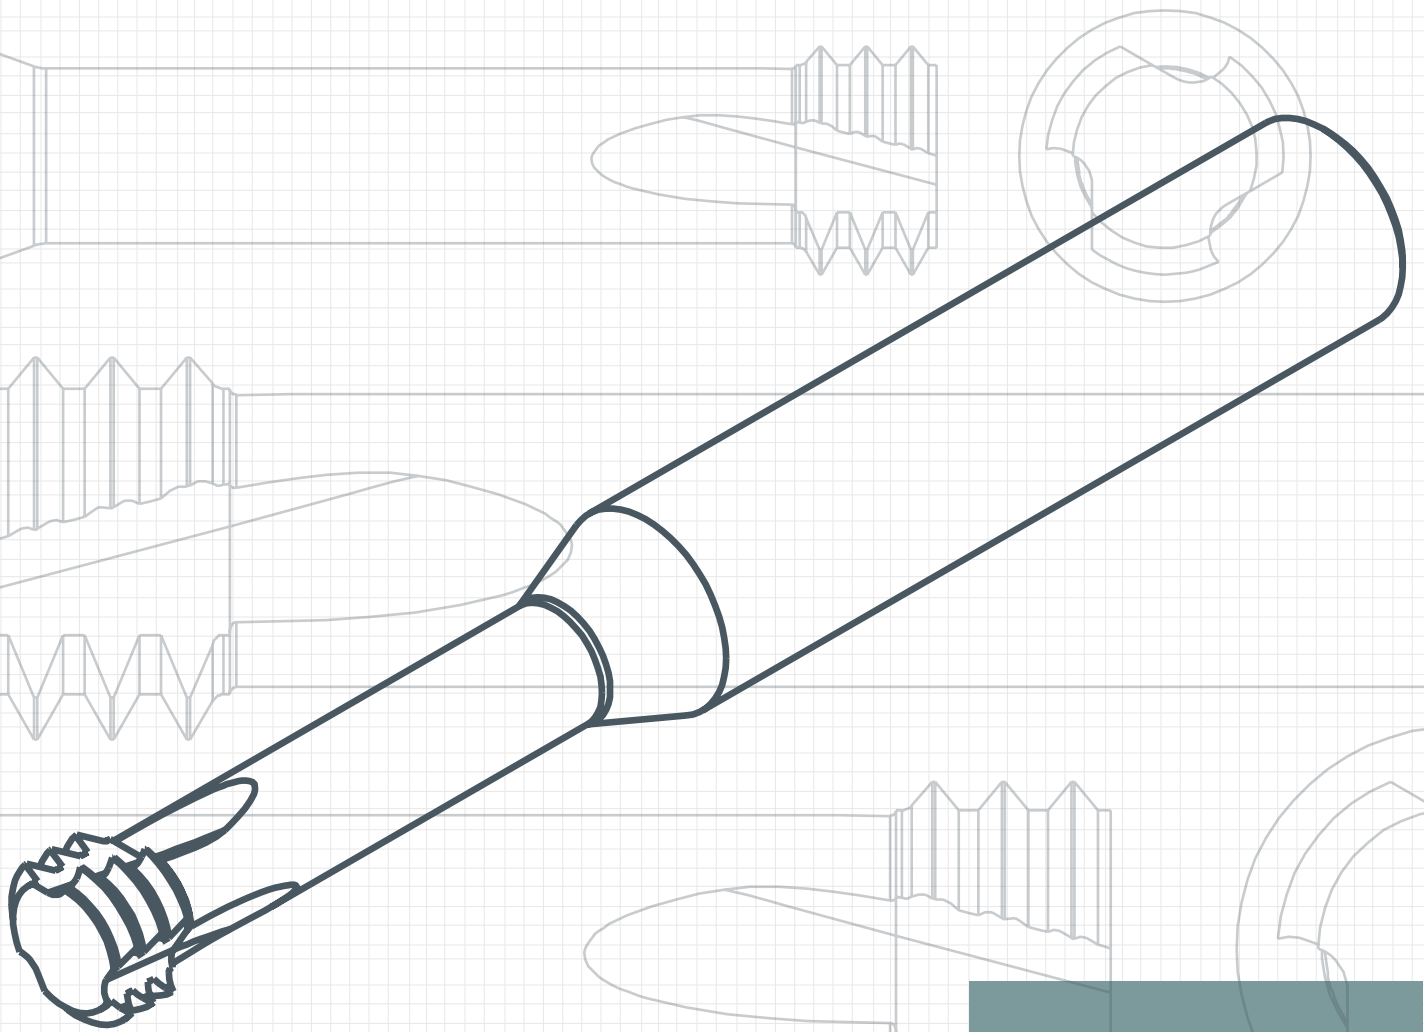

PMRN-3T

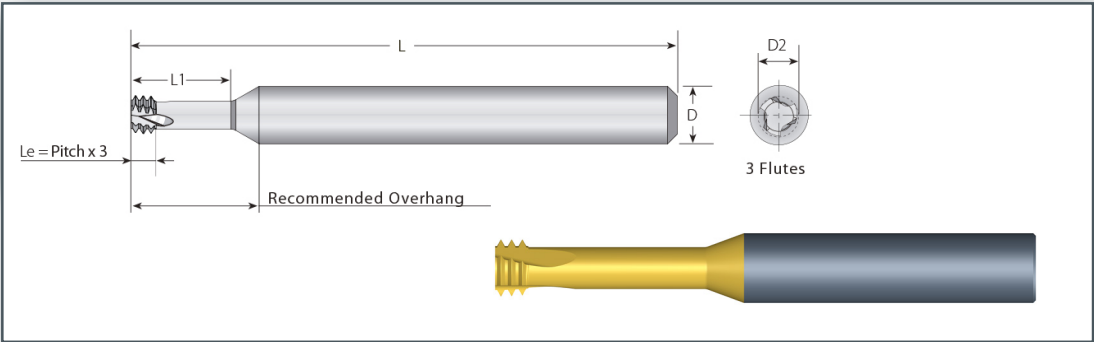

2.0 x Ø (L1 ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	mm
M1.6x0.35	-	0.35	PMRN 03 012 L3 0.35ISO 3T	3.00	1.20	30.00	3.40	3	3	1.25
M2x0.4	-	0.40	PMRN 06 015 L4 0.4ISO 3T	6.00	1.55	57.00	4.20	3	3	1.60
M2.5x0.45	-	0.45	PMRN 06 019 L5 0.45ISO 3T	6.00	1.95	57.00	5.20	3	3	2.05
M3x0.5	M3.5-M16x0.5	0.50	PMRN 06 024 L6 0.5ISO 3T	6.00	2.40	57.00	6.25	3	3	2.50
M4x0.7	-	0.70	PMRN 06 031 L8 0.7ISO 3T	6.00	3.15	57.00	8.35	3	3	3.30
M5x0.8	-	0.80	PMRN 06 040 L10 0.8ISO 3T	6.00	4.05	57.00	10.40	3	3	4.20
M6x1.0	M8-M40x1.0	1.00	PMRN 06 048 L12 1.0ISO 3T	6.00	4.80	57.00	12.50	3	3	5.00
M8x1.25	-	1.25	PMRN 08 065 L16 1.25ISO 3T	8.00	6.50	63.00	16.60	3	3	8.50
M10x1.5	M12-M48x1.5	1.50	PMRN 10 082 L20 1.5ISO 3T	10.00	8.20	73.00	20.80	3	3	8.50
M12x1.75	-	1.75	PMRN 10 099 L25 1.75ISO 3T	10.00	9.90	83.00	25.00	3	3	10.30
M16x2.0	-	2.00	PMRN 12 119 L33 2.0ISO 3T	12.00	11.90	83.00	33.00	3	3	14.00

3.0 x Ø (L1 ≤ 3.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	mm
M1.6x0.35	-	0.35	PMRN 03 012 L5 0.35ISO 3T	3	1.20	30	5.00	3	3	1.25
M2x0.4	-	0.40	PMRN 06 015 L6 0.4ISO 3T	6	1.55	57	6.20	3	3	1.60
M2x0.4	-	0.40	PMRN 03 015 L6 0.4ISO 3T	3	1.55	30	6.20	3	3	1.60
M2.5x0.45	-	0.45	PMRN 03 019 L7 0.45ISO 3T	3	1.95	30	7.70	3	3	2.05
M2.5x0.45	-	0.45	PMRN 06 019 L7 0.45ISO 3T	6	1.95	57	7.70	3	3	2.05
M3x0.5	M3.5-M16x0.5	0.50	PMRN 03 024 L9 0.5ISO 3T	3	2.40	30	9.20	3	3	2.50
M3x0.5	M3.5-M16x0.5	0.50	PMRN 06 024 L9 0.5ISO 3T	6	2.40	57	9.25	3	3	2.50
M4x0.7	-	0.70	PMRN 06 031 L12 0.7ISO 3T	6	3.15	57	12.30	3	3	3.30
M5x0.8	-	0.80	PMRN 06 040 L15 0.8ISO 3T	6	4.05	57	15.40	3	3	4.20
M6x1.0	M8-M40x1.0	1.00	PMRN 06 048 L18 1.0ISO 3T	6	4.80	57	18.50	3	3	5.00
M8x1.25	-	1.25	PMRN 08 065 L24 1.25ISO 3T	8	6.50	63	24.60	3	3	6.80


*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

UNIFIED

MINIATURE THREAD MILLS

ASME/ANSI B1.1 - 60° INCLUSIVE

INTERNAL

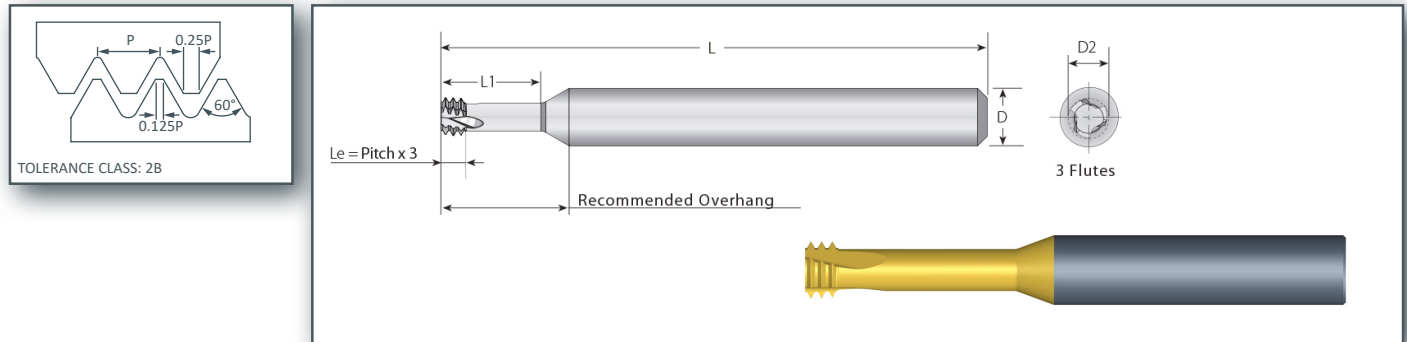**2.0 x Ø** ($L_e \leq 2.0 \times \text{Thread Diameter}$)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNC	UNF	TPI		D	D2	L	L1	Z	Zt	mm
No.2-56	No.3-56	56	PMRN 06 016 L5 56UN 3T	6	1.65	57	5.00	3	3	1.80
No.4, No.5-40	No.6-40	40	PMRN 06 021 L6 40UN 3T	6	2.10	57	6.00	3	3	2.30
No.6, No.8-32	No.10-32	32	PMRN 06 025 L7 32UN 3T	6	2.55	57	7.41	3	3	2.80
No.8-32	No.10-32	32	PMRN 06 032 L10 32UN 3T	6	3.20	57	10.00	3	3	3.50
-	1/4"x28	28	PMRN 06 052 L13 28UN 3T	6	5.25	57	13.20	3	3	5.50
No.10-24	5/16"x24	24	PMRN 06 035 L10 24UN 3T	6	3.58	57	10.20	3	3	3.90
1/4"x20	7/16"x20	20	PMRN 06 048 L13 20UN 3T	6	4.88	57	13.40	3	3	5.20

3.0 x Ø ($L_1 \leq 3.0 \times \text{Thread Diameter}$)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNC	UNF	TPI		D	D2	L	L1	Z	Zt	mm
-	No.1-72	72	PMRN 03 014 L5 72UN 3T	3	1.45	30	5.75	3	3	1.60
No.2-56	No.3-56	56	PMRN 03 016 L7 56UN 3T	3	1.65	30	7.00	3	3	1.80
No.4, No.5-40	No.6-40	40	PMRN 03 021 L9 40UN 3T	3	2.10	30	9.00	3	3	2.30
No.4, No.5-40	No.6-40	40	PMRN 06 021 L9 40UN 3T	6	2.10	57	9.00	3	3	2.30
No.6, No.8-32	No.10-32	32	PMRN 03 025 L11 32UN 3T	3	2.55	30	11.00	3	3	2.80
No.6, No.8-32	No.10-32	32	PMRN 06 025 L11 32UN 3T	6	2.55	57	11.00	3	3	2.80
No.8-32	No.10-32	32	PMRN 06 032 L13 32UN 3T	6	3.20	57	13.00	3	3	3.40
-	1/4"x28	28	PMRN 06 052 L19 28UN 3T	6	5.25	57	19.60	3	3	5.50
-	5/16"x24	24	PMRN 08 066 L24 24UN 3T	8	6.67	63	24.50	3	3	6.90
1/4"x20	7/16"x20	20	PMRN 06 048 L19 20UN 3T	6	4.88	57	19.80	3	3	5.10



*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

UNJ

BS A 346:2000 60° INCLUSIVE

MINIATURE THREAD MILLS

INTERNAL

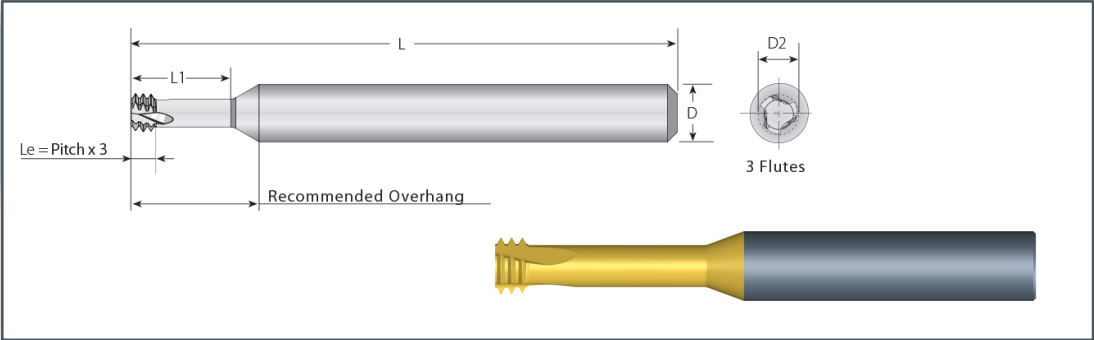

3.0 x Ø (L1 ≤ 3.0 x Thread Diameter)


THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNJC	UNJF	TPI		D	D2	L	L1	Z	Zt	mm
0.138" (#6)	0.190" (#10)	32	PMRN 06 027 L11 32UNJ 3T	6	2.70	57	11.00	3	3	2.80
-	0.250" (1/4")	28	PMRN 06 054 L19 28UNJ 3T	6	5.40	57	19.50	3	3	5.60
-	0.3125" (5/16")	24	PMRN 08 067 L24 24UNJ 3T	8	6.70	63	24.10	3	3	7.00
-	0.4375" (7/16")	20	PMRN 10 096 L33 20UNJ 3T	10	9.60	73	33.50	3	3	10.00

MJ

ISO 5855 60° INCLUSIVE

MINIATURE THREADMILLS

INTERNAL

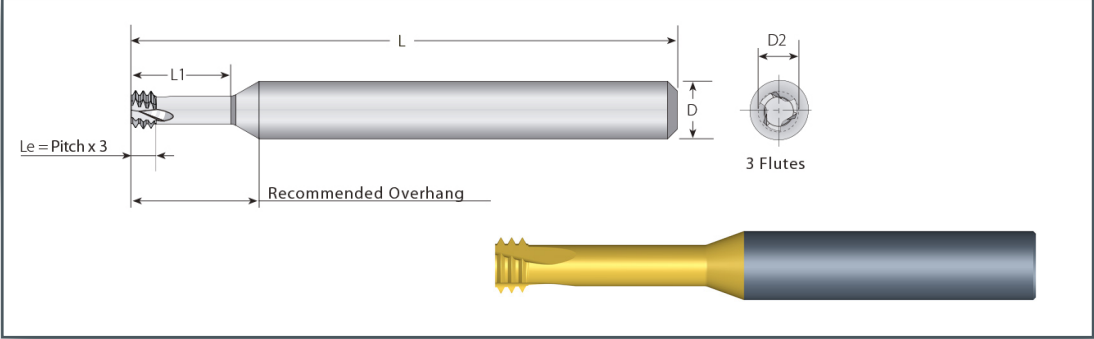


3.0 x Ø (L1 ≤ 3.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
STANDARD		mm		D	D2	L	L1	Z	Zt	mm
MJ4x0.7		0.70	PMRN 06 031 L12 0.7MJ 3T	6	3.15	57	12.30	3	3	3.40
MJ5x0.8		0.80	PMRN 06 040 L15 0.8MJ 3T	6	4.05	57	15.40	3	3	4.30
MJ6x1.0		1.00	PMRN 06 048 L18 1.0MJ 3T	6	4.80	57	18.50	3	3	5.10
MJ8x1.25		1.25	PMRN 08 065 L24 1.25MJ 3T	8	6.50	63	24.50	3	3	6.90

*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

POSITHREAD

PIXIHD MINI THREAD MILLS
FOR MATERIALS UP TO 62HRC

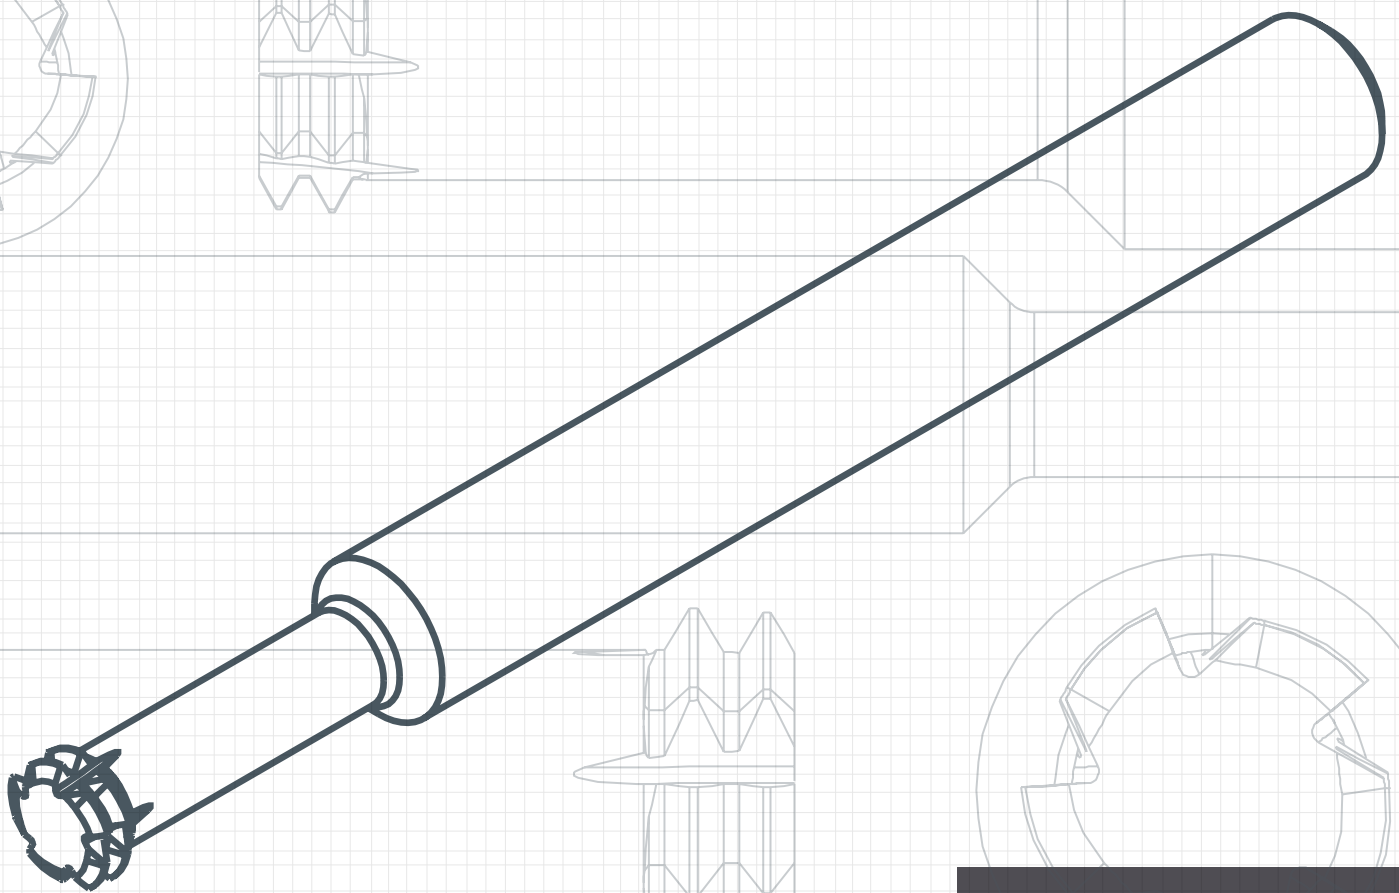


PMRN-2TL

ISO

MINIATURE THREAD MILLS FOR HARD MATERIALS

DIN13 60° INCLUSIVE

INTERNAL LEFT HAND

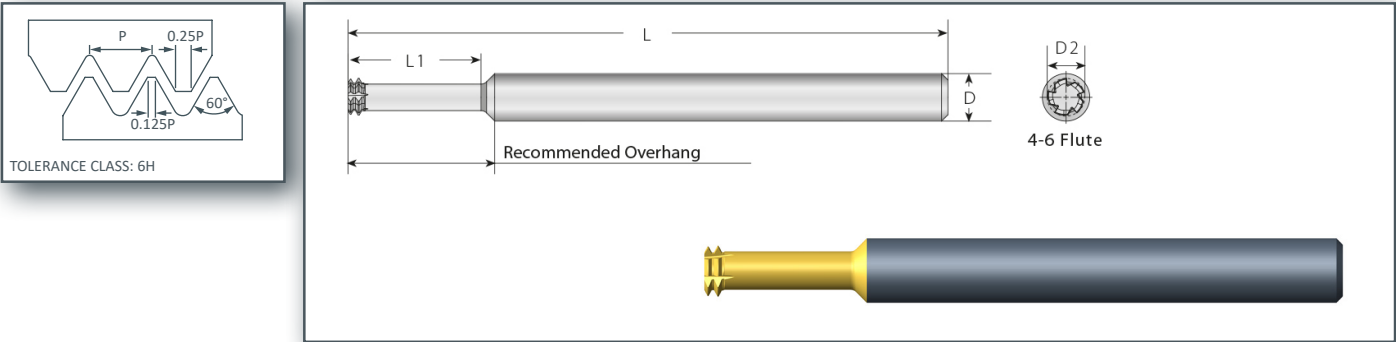

2.0 x Ø (L1 ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	mm
M4x0.7	-	0.70	PMSN 06 031 L8 0.7ISO 2TL	6	3.15	76	9.05	4	2	3.35
M5x0.8	-	0.80	PMSN 06 040 L10 0.8ISO 2TL	6	4.05	76	11.20	4	2	4.30
M6x1.0	M8-M40x1.0	1.00	PMSN 06 048 L12 1.0ISO 2TL	6	4.80	76	13.50	5	2	5.10
M10x1.5	M12-M48x1.50	1.50	PMSN 08 079 L20 1.5ISO 2TL	8	7.90	80	22.30	6	2	8.60

3.0 x Ø (L1 ≤ 3.0 x Thread Diameter)


THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	mm
M3x0.5	M3.5-M16x0.5	0.50	PMSN 06 024 L9 0.5ISO 2TL	6	2.40	76	9.75	4	2	2.55
M4x0.7	-	0.70	PMSN 06 031 L12 0.7ISO 2TL	6	3.15	76	13.05	4	2	3.35
M5x0.8	-	0.80	PMSN 06 040 L15 0.8ISO 2TL	6	4.05	76	16.20	4	2	4.30
M6x1.0	M8-M40x1.0	1.00	PMSN 06 048 L18 1.0ISO 2TL	6	4.80	76	19.50	5	2	5.10
M8x1.25	-	1.25	PMSN 08 065 L24 1.25ISO 2TL	8	6.50	80	25.85	5	2	6.80

UNIFIED

MINIATURE THREAD MILLS FOR HARD MATERIALS

ASME/ANSI B1.1 - 60° INCLUSIVE

INTERNAL LEFT HAND

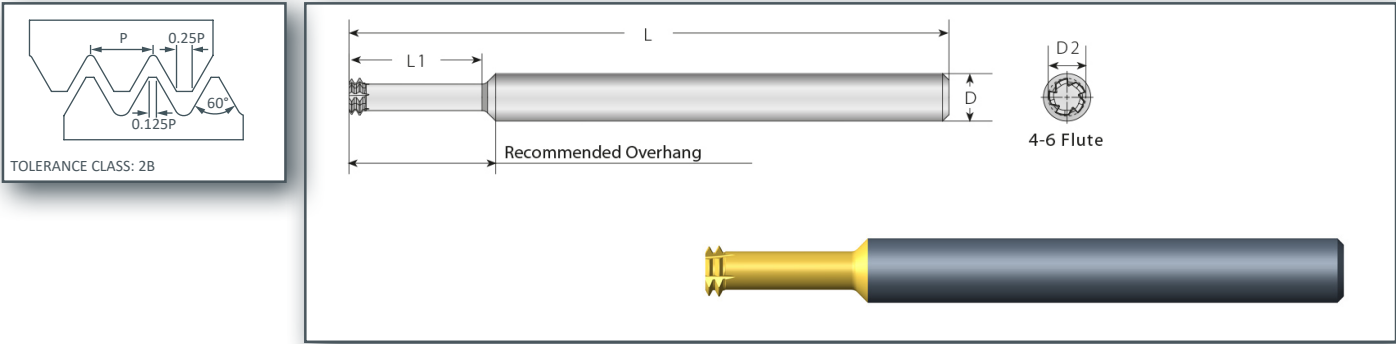


2.0 x Ø (L1 ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH	BORE*
UNC	UNF	TPI		D	D2	L	L1	Z	Zt	mm
-	No.10-32	32	PMSN 06 037 L10 32UN 2TL	6	3.7	76	10.8	4	2	4.17


*BORE DIAMETER APPLIES TO SMALLEST THREAD DIAMETER

POSITHREAD

TMDN DRILL-THREAD MILL-CHAMFER

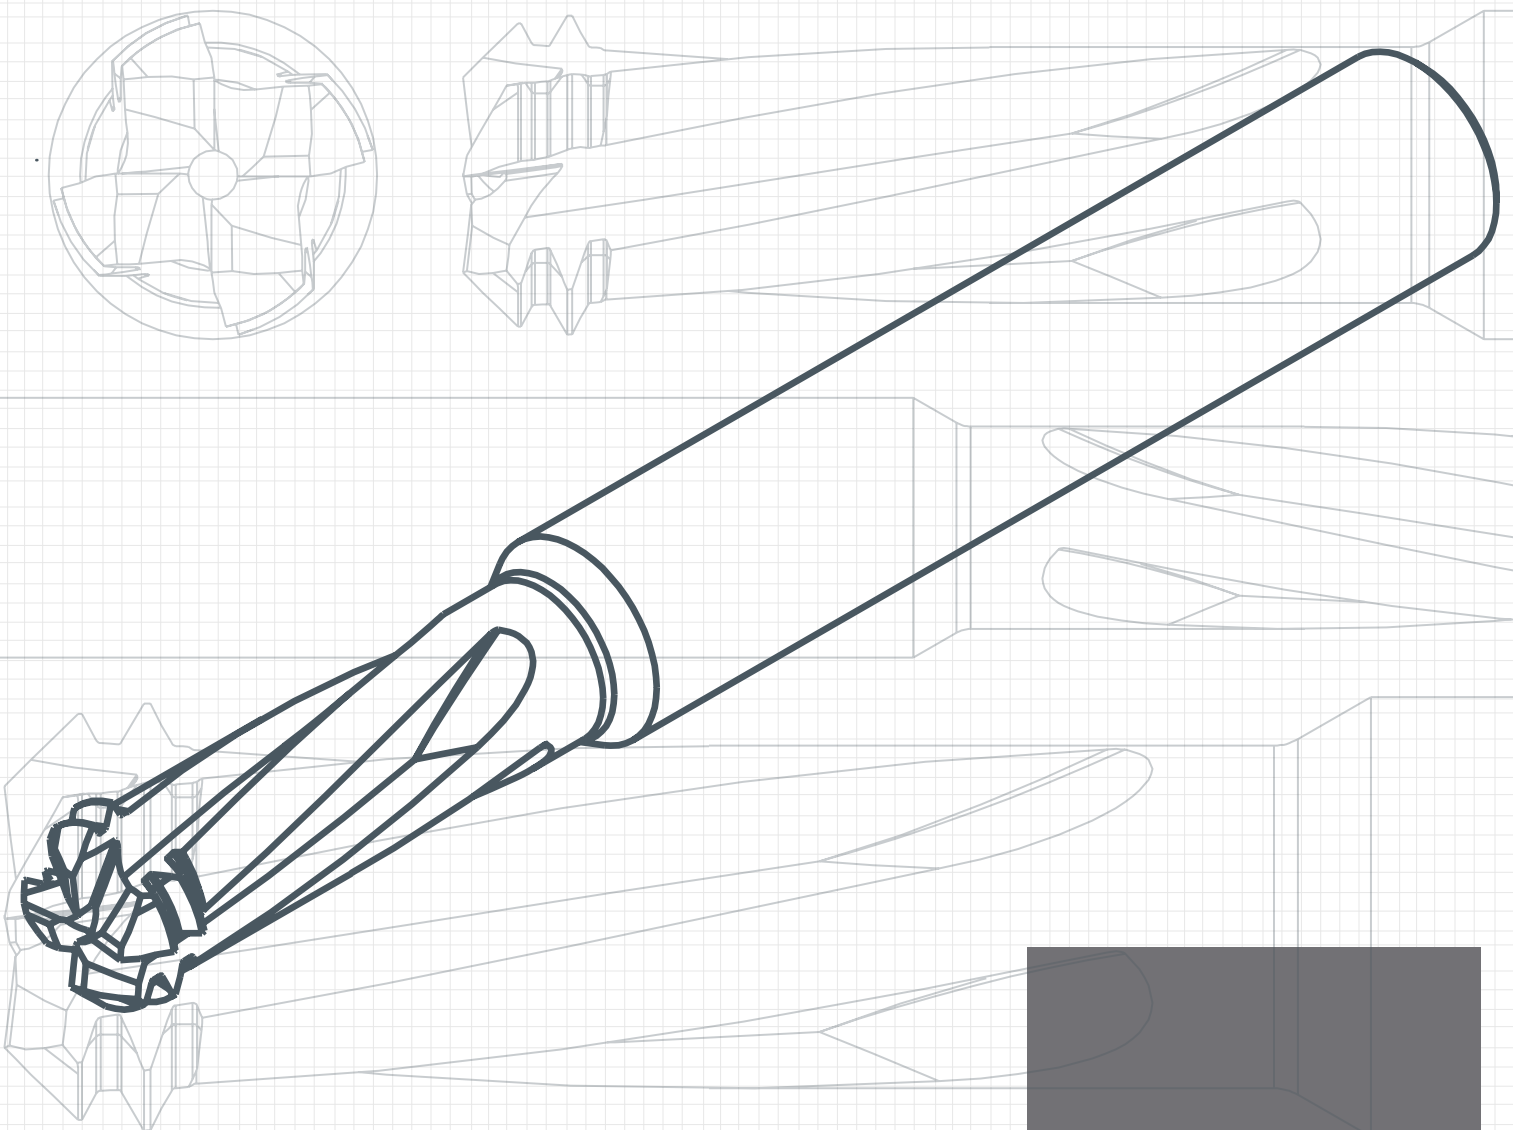

TMDN

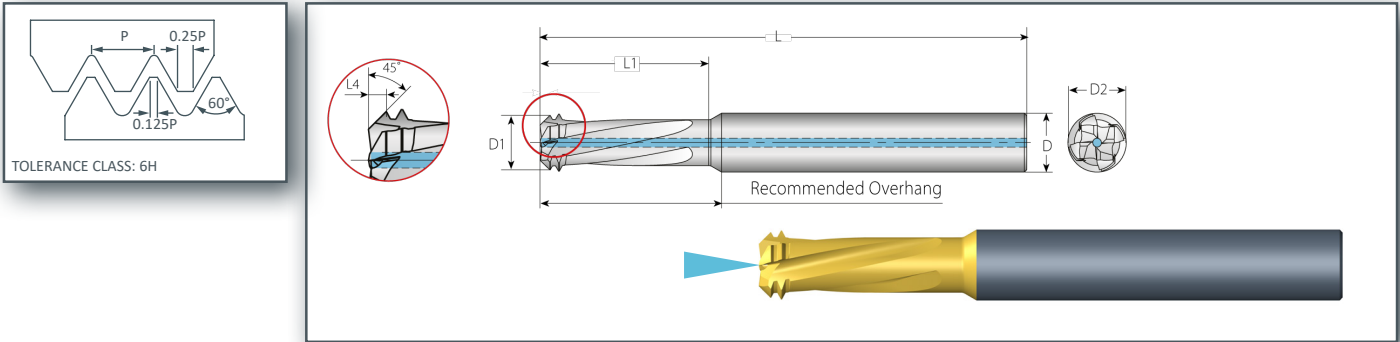

WITH THRU-COOLANT

2.0 x Ø (L1 ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH		
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	L4	D1
M10x1.5	M11-M15x1.5	1.50	TMDN 08 078 L23 1.5ISO-C 2TL	8	7.8	64	23	4	2	1.12	7.24

WITHOUT THRU-COOLANT

2.0 x Ø (L1 ≤ 2.0 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH		
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	L4	D1
M4x0.7	-	0.70	TMDN 06 032 L9 0.7ISO 2TL	6	3.2	58	9.2	3	2	0.57	2.88
M5x0.8	-	0.80	TMDN 06 039 L11 0.8ISO 2TL	6	3.9	58	11.5	3	2	0.7	3.51

WITHOUT THRU-COOLANT



2.5 x Ø (L1 ≤ 2.5 x Thread Diameter)

THREAD		PITCH	DESCRIPTION	DIMENSIONS mm				NO. OF FLUTES	NO. OF TEETH		
M COARSE	M FINE	mm		D	D2	L	L1	Z	Zt	L4	D1
M3x0.5	M4x0.5	0.50	TMDN 06 024 L8 0.5ISO 2TL	6	2.4	58	8.5	3	2	0.4	2.08
M4x0.7	-	0.70	TMDN 06 032 L11 0.7ISO 2TL	6	3.2	58	11.2	3	2	0.57	2.88
M5x0.8	-	0.80	TMDN 06 039 L14 0.8ISO 2TL	6	3.9	58	14.4	3	2	0.7	3.51

1ST TOOTH: PARTIAL PROFILE (ROUGHING) 2ND TOOTH: FULL PROFILE (FINISHING)

TWO CUTTING TEETH:
PARTIAL PROFILE FOR LEADING
TOOTH FOLLOWED BY FULL
PROFILE FOR FINISHING


THE WORK DIRECTION SHOULD BE
FROM THE TOP TO THE BOTTOM
(CLIMB MILLING)



TMDN TOOLS ARE
LEFT HANDED
FOR CNC USE M04 CODE


POSIThread

INDEXABLE THREAD MILLS

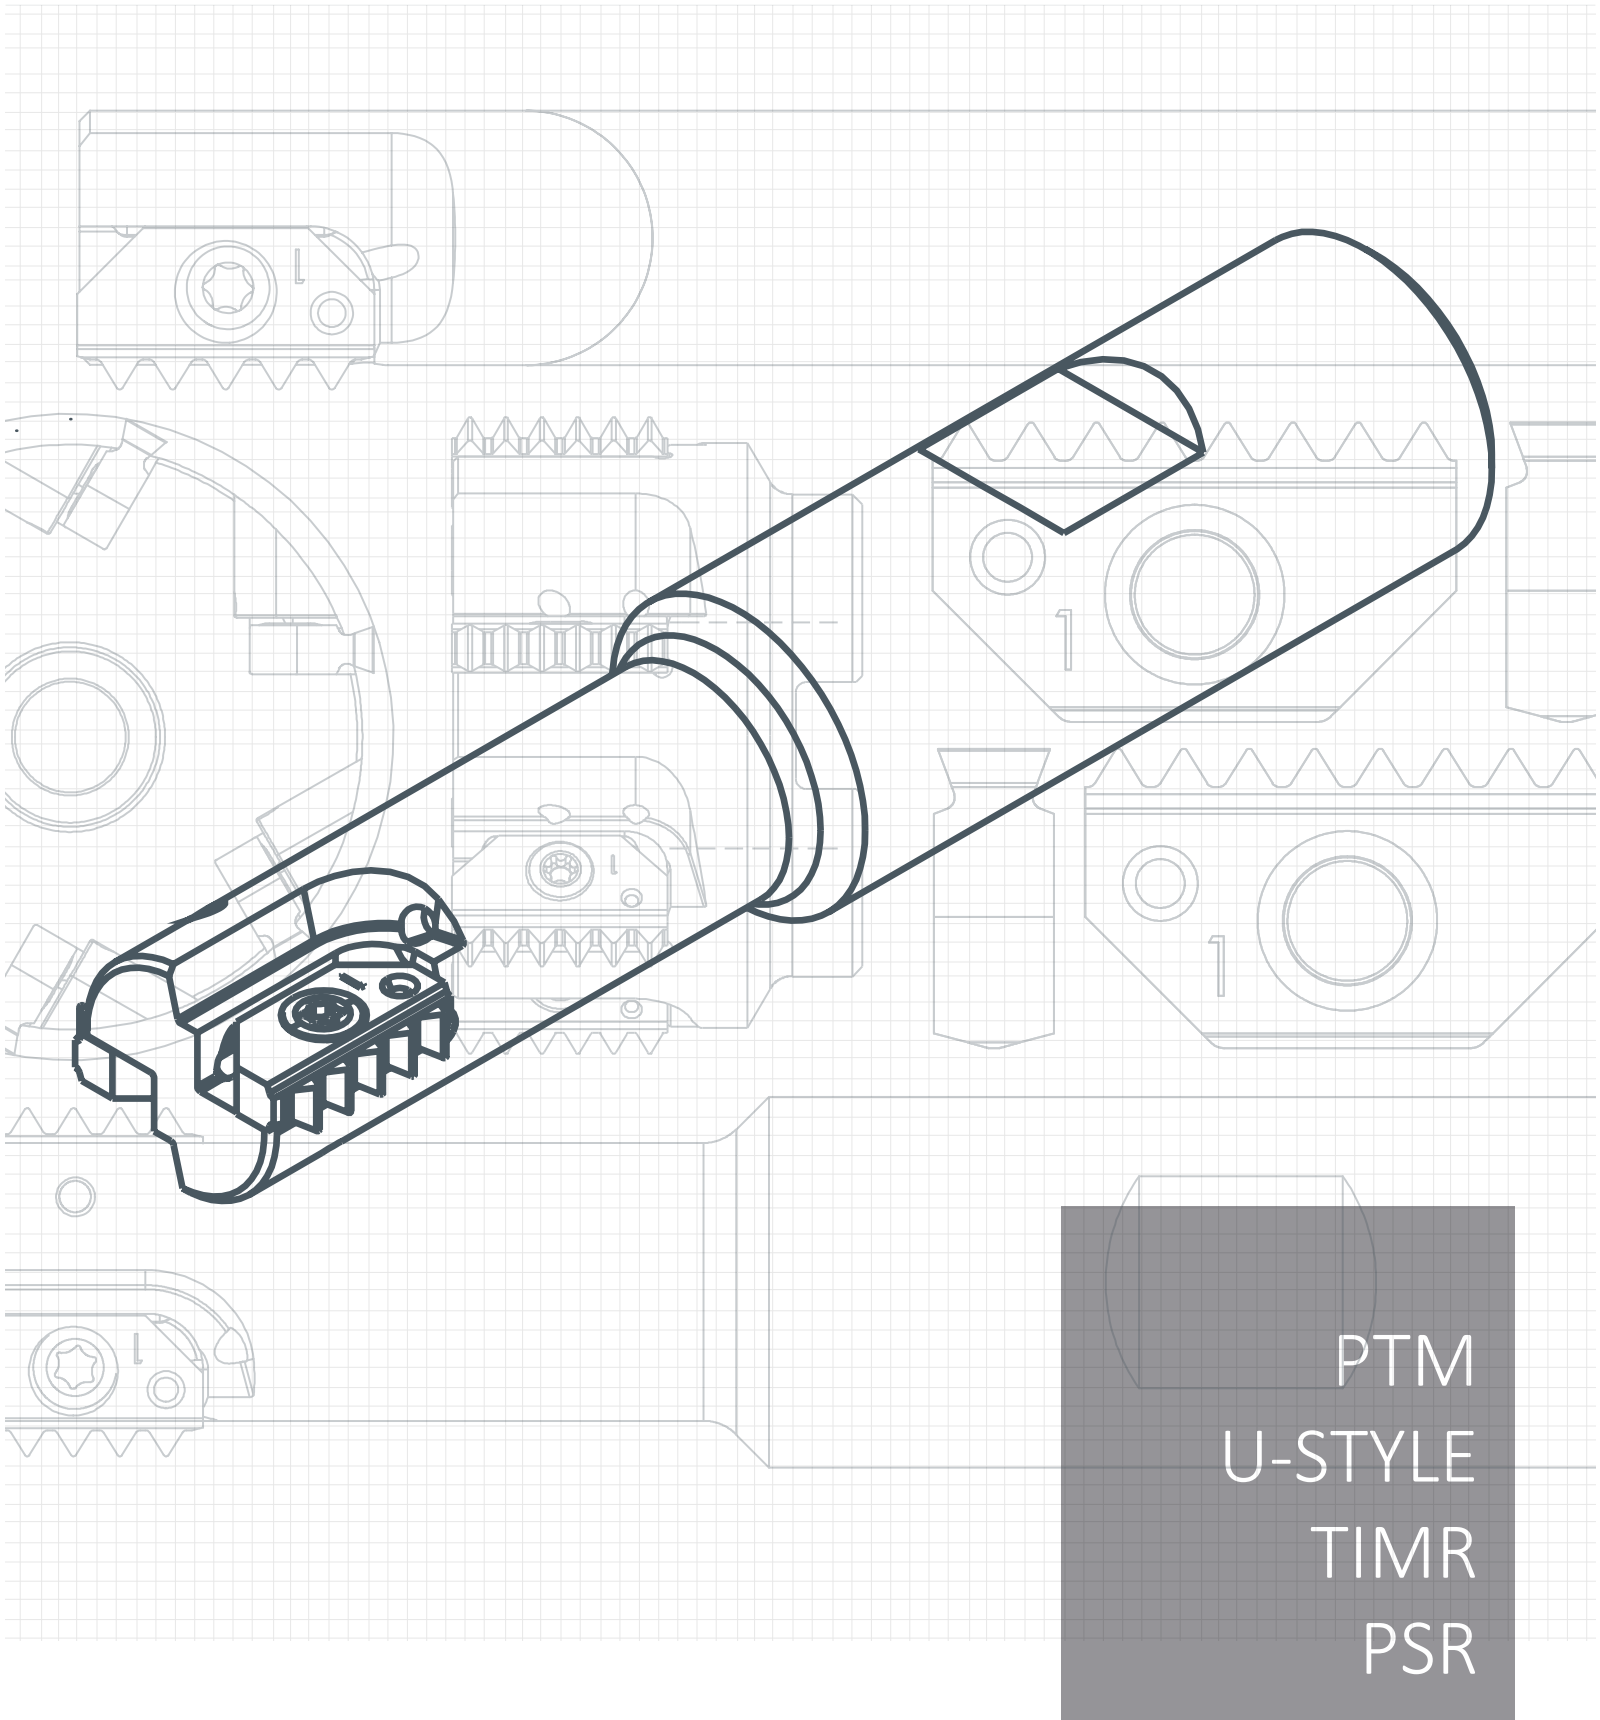

PTM
U-STYLE
TIMR
PSR

INDEXABLE THREAD MILL IDENTIFICATION CODE

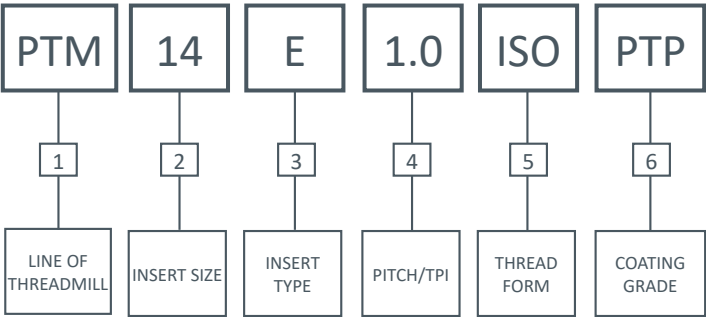

1 LINE OF THREAD MILL	
PTM	INDEXABLE THREAD MILL INSERT

2 INSERT SIZE	
14	14.00mm LENGTH
21	21.00mm LENGTH

3 INSERT TYPE	
E	EXTERNAL
N	INTERNAL
X	EXTERNAL/INTERNAL

4 PITCH/TPI	
14	14TPI
1.0	1.0mm PITCH

5 THREAD FORM	
ISO	ISO
UN	UNIFIED
W	BRITISH STANDARD WHITWORTH
BSPT	BRITISH STANDARD PIPE TAPER
NPT	NATIONAL PIPE THREAD
ACME	GENERAL PURPOSE ACME
TR	TRAPEZOIDAL

6 COATING GRADE	
PTP	TiCN

POSITHREADPLUS


PTP *TiCN*

BENEFITS OF PTP

- A tough Sub-micron substrate with chipping resistance
- TiCN coating for high wear resistance
- Low thermal conductivity – Ideal for interrupted cuts

APPLICATIONS


- General purpose grade
- Excellent for Steels (Unalloyed, Alloyed, Cast) Stainless Steel and other ferrous materials

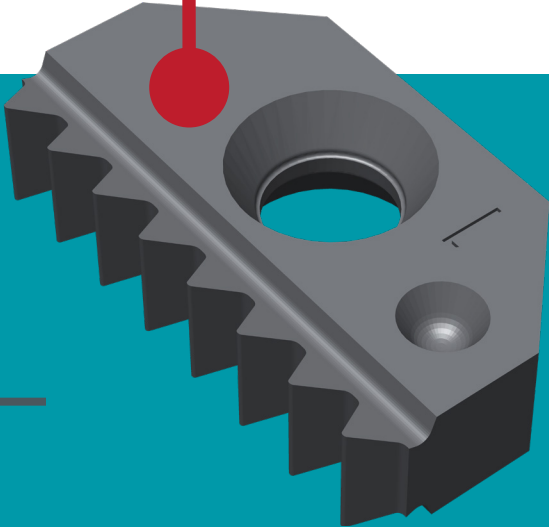

ISO

DOUBLE SIDED

DIN13 60° INCLUSIVE

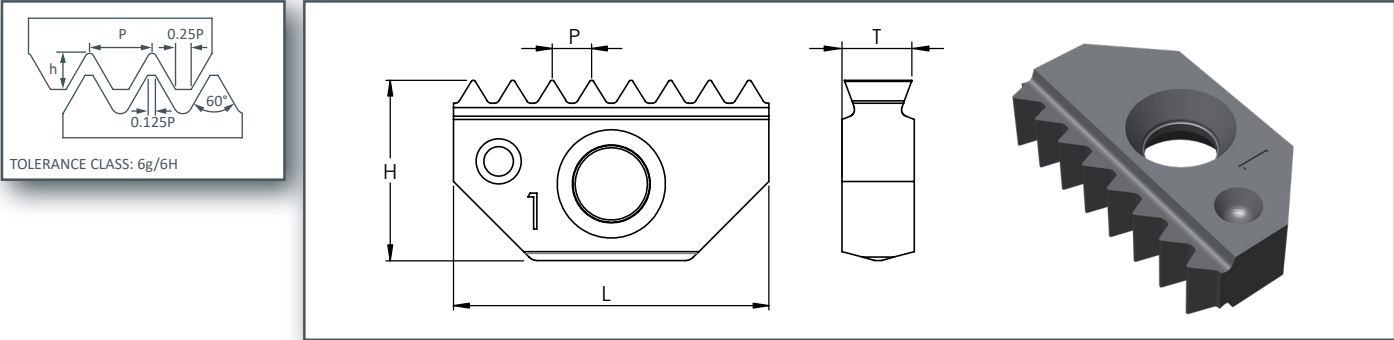

EXTERNAL


PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
mm				L	H	T
1.00	PTM14	PTM14 E 1.0ISO	14	14	8	3.10
1.25		PTM14 E 1.25ISO	11			
1.50		PTM14 E 1.5ISO	9			
2.00		PTM14 E 2.0ISO	7			
1.50	PTM21	PTM21 E 1.5ISO	14	21	12.65	4.65
2.00		PTM21 E 2.0ISO	10			
3.00		PTM21 E 3.0ISO	6			

INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
mm				L	H	T
1.00	PTM14	PTM14 N 1.0ISO	14	14	8	3.10
1.25		PTM14 N 1.25ISO	11			
1.50		PTM14 N 1.5ISO	9			
1.75		PTM14 N 1.75ISO	8			
2.00		PTM14 N 2.0ISO	7			
2.50		PTM14 N 2.5ISO	5			
1.50	PTM21	PTM21 N 1.5ISO	14	21	12.65	4.65
2.00		PTM21 N 2.0ISO	10			
3.00		PTM21 N 3.0ISO	7			
3.50		PTM21 N 3.5ISO	6			

UNIFIED
ASME/ANSI B1.1:74 - 60° INCLUSIVE

DOUBLE SIDED

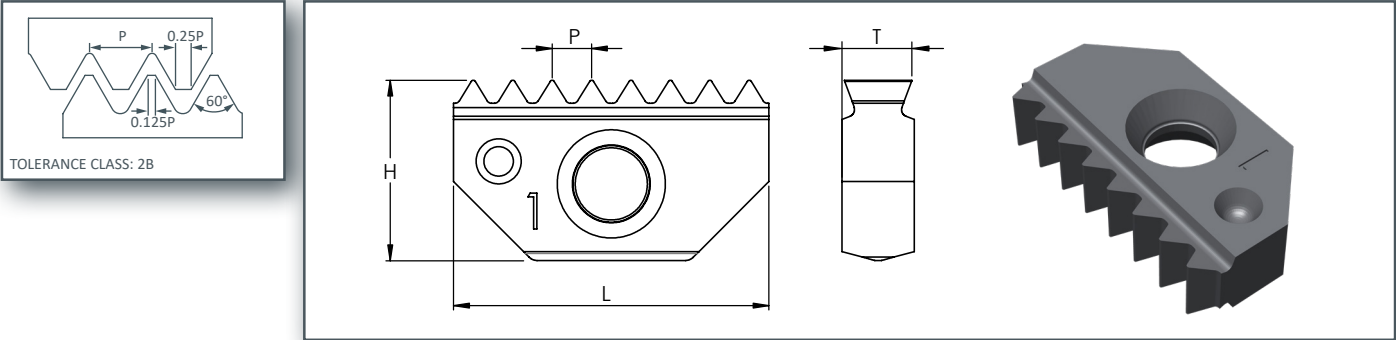

EXTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
24	PTM14	PTM14 E 24UN	13	14	8	3.10
20		PTM14 E 20UN	11			
18		PTM14 E 18UN	9			
16		PTM14 E 16UN	8			
14		PTM14 E 14UN	7			
12		PTM14 E 12UN	6			
20	PTM21	PTM21 E 20UN	16	21	12.65	4.65
18		PTM21 E 18UN	14			
16		PTM21 E 16UN	13			
14		PTM21 E 14UN	11			
12		PTM21 E 12UN	9			
10		PTM21 E 10UN	8			


INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
32	PTM14	PTM14 N 32UN	17	14	8	3.10
20		PTM14 N 20UN	11			
18		PTM14 N 18UN	9			
16		PTM14 N 16UN	8			
14		PTM14 N 14UN	7			
12		PTM14 N 12UN	6			
10		PTM14 N 10UN	5			
20	PTM21	PTM21 N 20UN	16	21	12.65	4.65
18		PTM21 N 18UN	14			
16		PTM21 N 16UN	13			
14		PTM21 N 14UN	11			
12		PTM21 N 12UN	9			
8		PTM21 N 8UN	6			

UNJ

DOUBLE SIDED

BS A 346:2000 60° INCLUSIVE

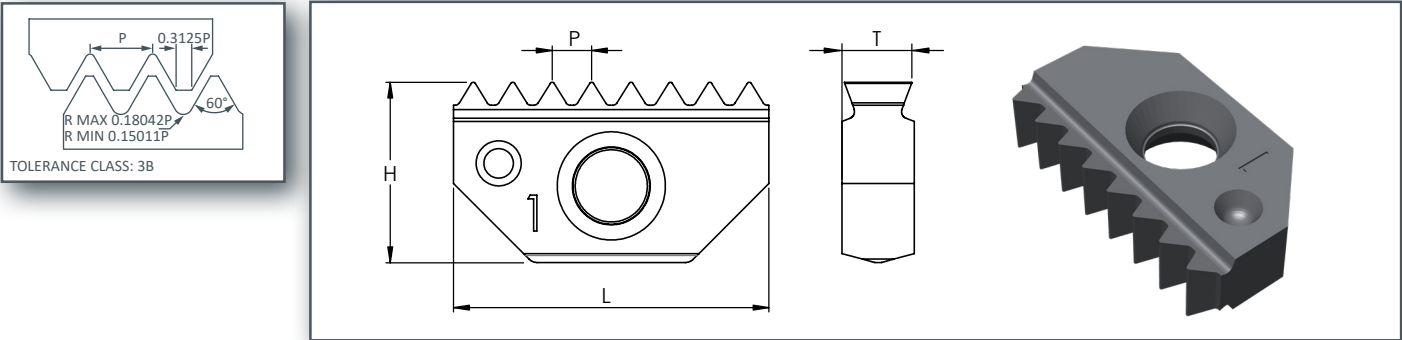


EXTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
20	PTM14	PTM14 E 20UNJ	10	14	8	3.10
18		PTM14 E 18UNJ	9			
16		PTM14 E 16UNJ	8			
12		PTM14 E 12UNJ	6			

INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
16	PTM14	PTM14 N 16UNJ	8	14	8	3.10
12		PTM14 N 12UNJ	6			

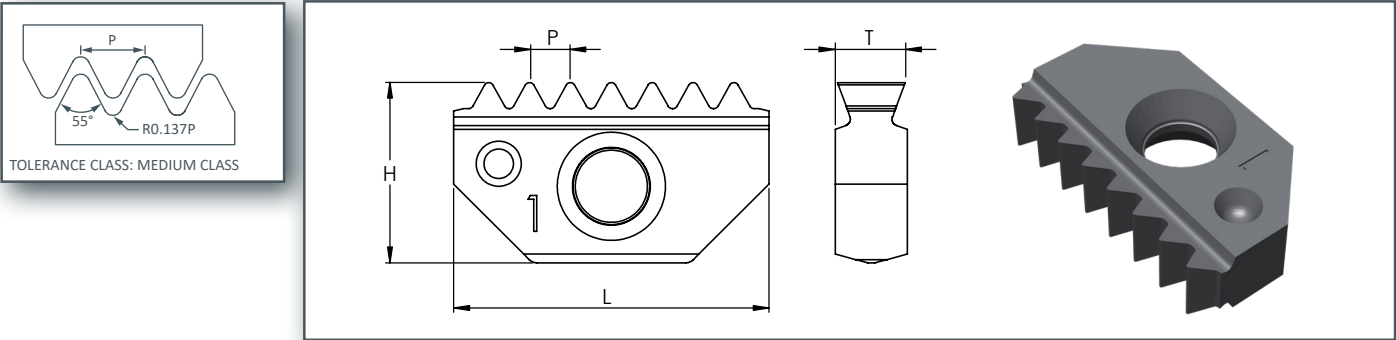


EXTERNAL ~~X~~ INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
				L	H	T
19	PTM14	PTM14 X 19W	10	14	8	3.10
18		PTM14 X 18W	9			
16		PTM14 X 16W	8			
14		PTM14 X 14W	7			
12		PTM14 X 12W	6			
11		PTM14 X 11W	6			
14	PTM21	PTM21 X 14W	11	21	12.65	4.65
11		PTM21 X 11W	9			

NPT

SINGLE SIDED

ASME/ANSI B1.20.1 60° INCLUSIVE 1/16 TAPER

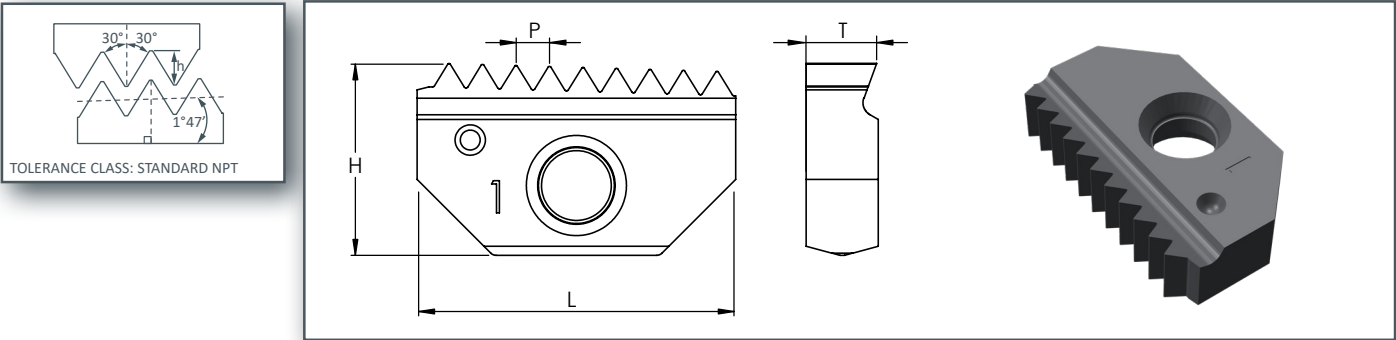


EXTERNAL ~~X~~ INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
14	PTM14	PTM14 XS 14NPT	7	14	8	3.10
14	PTM21	PTM21 XS 14NPT	11	21	12.65	4.65
11.5		PTM21 XS 11.5NPT	9			

NPTF

SINGLE SIDED


ASME/ANSI B1.20.13 60° INCLUSIVE 1/16 TAPER

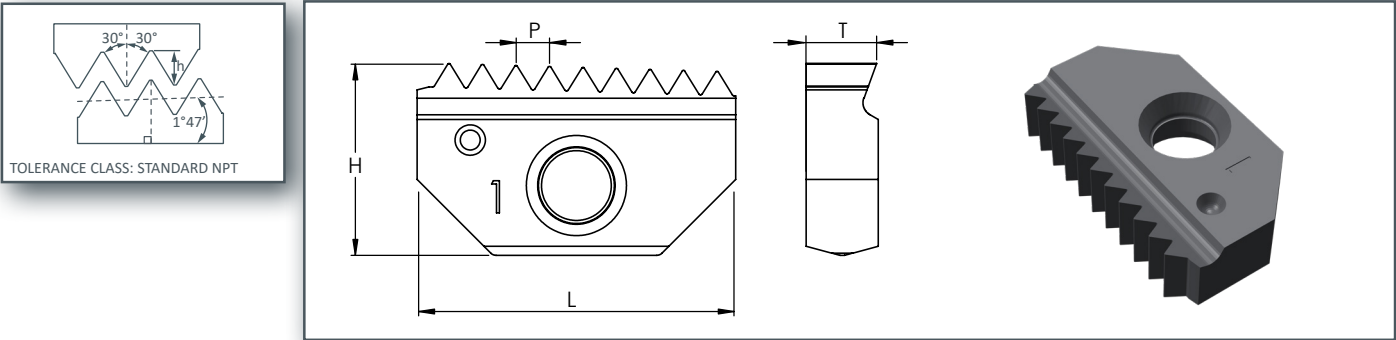

EXTERNAL ~~X~~ INTERNAL

PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
TPI				L	H	T
14	PTM14	PTM14 XS 14NPTF	7	14	8	3.10
14	PTM21	PTM21 XS 14NPTF	11	21	12.65	4.65
11.5		PTM21 XS 11.5NPTF	9			


BS21 55° INCLUSIVE 1/16 TAPER

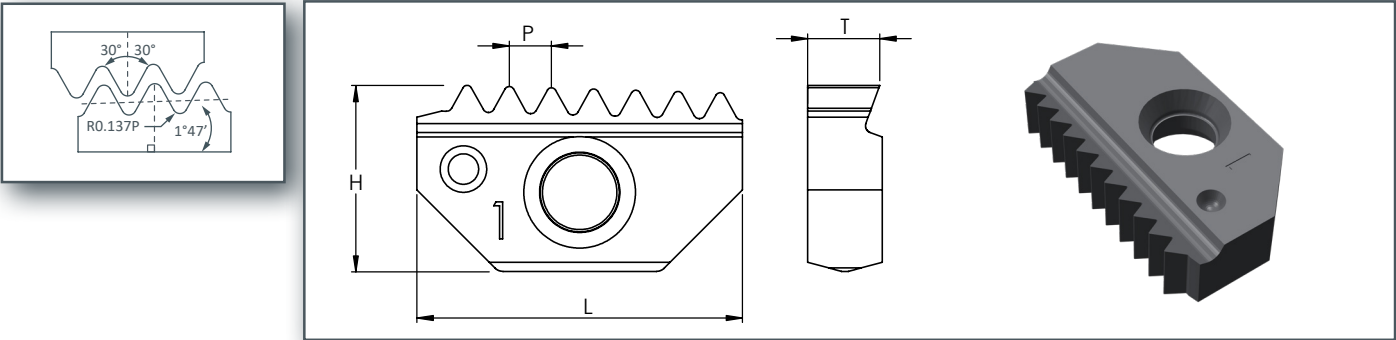

EXTERNAL ~~X~~ INTERNAL


PITCH	BLANK	DESCRIPTION	NO. OF TEETH	DIMENSIONS mm		
				L	H	T
19	PTM14	PTM14 XS 19BSPT	9	14	8	3.10
14		PTM14 XS 14BSPT	7			
11	PTM21	PTM21 XS 11BSPT	8	21	12.65	4.65

PARTIAL PROFILE
60° INCLUSIVE

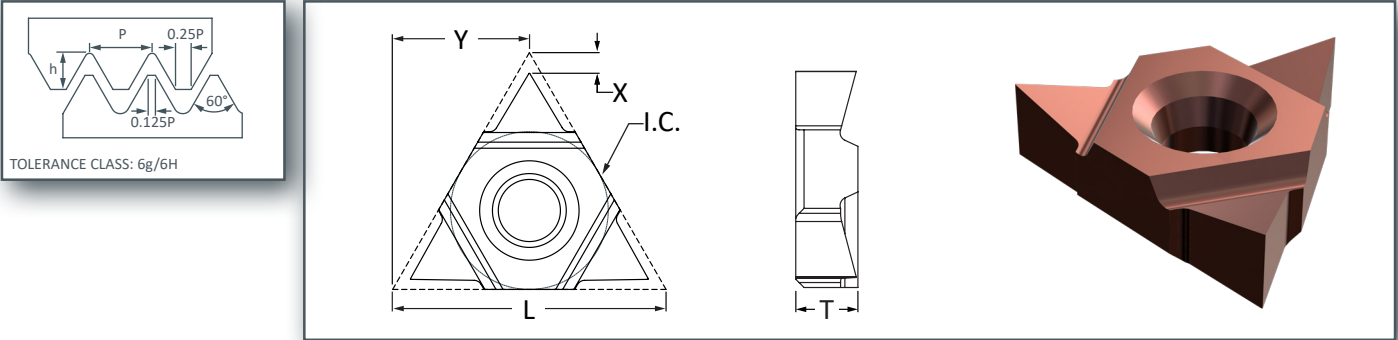

L	IC	PITCH	DESCRIPTION	DIMENSIONS mm				
mm	mm	mm	TPI	R. MAX	X	Y	T	
11.00	6.35	0.50-1.50	48-16	T11NU 60	0.040	0.40	5.50	3.35
16.00	9.525	0.50-3.00	48-8	T16NU 60	0.040	0.60	8.00	3.60
22.00	12.70	5.00-6.00	5-4	T22NU 60	0.36	0.80	11.00	4.90

PARTIAL PROFILE
55° INCLUSIVE

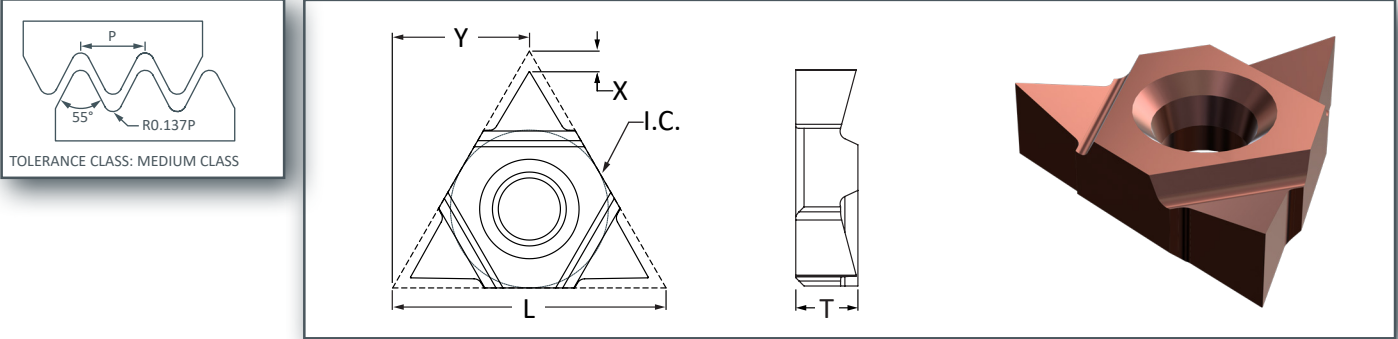


L	IC	PITCH	DESCRIPTION	DIMENSIONS mm				
mm	mm	mm	TPI	R. MAX	X	Y	T	
11.00	6.35	0.50-1.50	48-16	T11NU 55	0.040	0.40	5.50	3.35
16.00	9.525	0.50-3.00	48-8	T16NU 55	0.040	0.60	8.00	3.60
22.00	12.70	5.00-6.00	5-4	T22NU 55	0.36	0.80	11.00	4.90

TOOLHOLDERS

TIMR


SINGLE INSERT

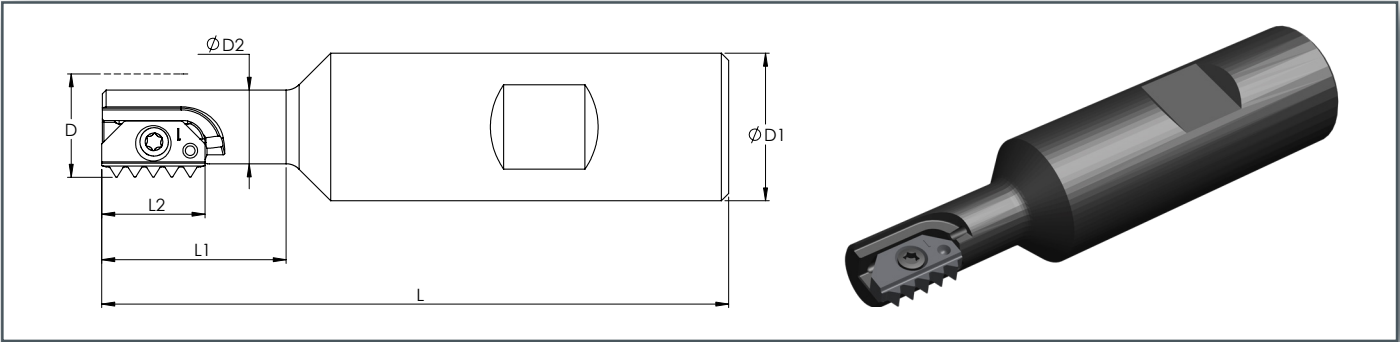

INSERT SIZE	TOOLHOLDER DESCRIPTION	DIMENSIONS mm						SPARES	
		D	D1	D2	L	L1	L2	SCREW	TORQ KEY
PTM14	TIMR2012-L20-14-1	12.20	20	8.4	75	20	14	IN14S	T8
	TIMR2014-L25-14-1	14.50	20	10	85	25	14	IN14S	T8
	TIMR2017-L30-14-1	17.00	20	12.8	85	30	14	IN14S	T8
PTM21	TIMR2018-L30-21-1	18.00	20	13.7	95	30	21	IN21	T15
	TIMR2021-L40-21-1	21.00	20	16	95	40	21	IN21	T15
	TIMR2025-L70-21-1	25.00	20	20	120	70	21	IN21	T15

TIMR


DOUBLE INSERT

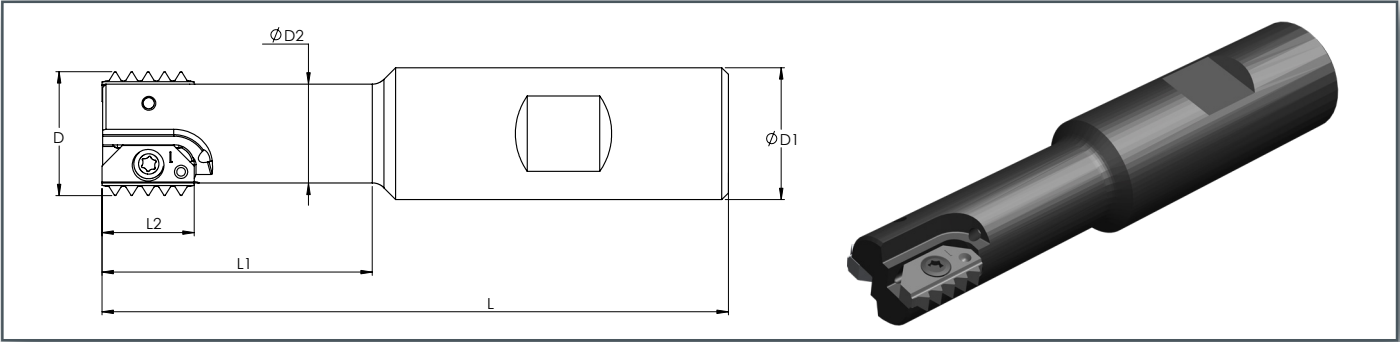


INSERT SIZE	TOOLHOLDER DESCRIPTION	DIMENSIONS mm						SPARES	
		D	D1	D2	L	L1	L2	SCREW	TORQ KEY
PTM14	TIMR2020-L41-14-2	20	20	15	95	41	14	IN14D	T8
PTM21	TIMR2530-L52-21-2	30	25	25	110	52	21	IN21	T15

TIMRC CARBIDE SHANK

SINGLE INSERT

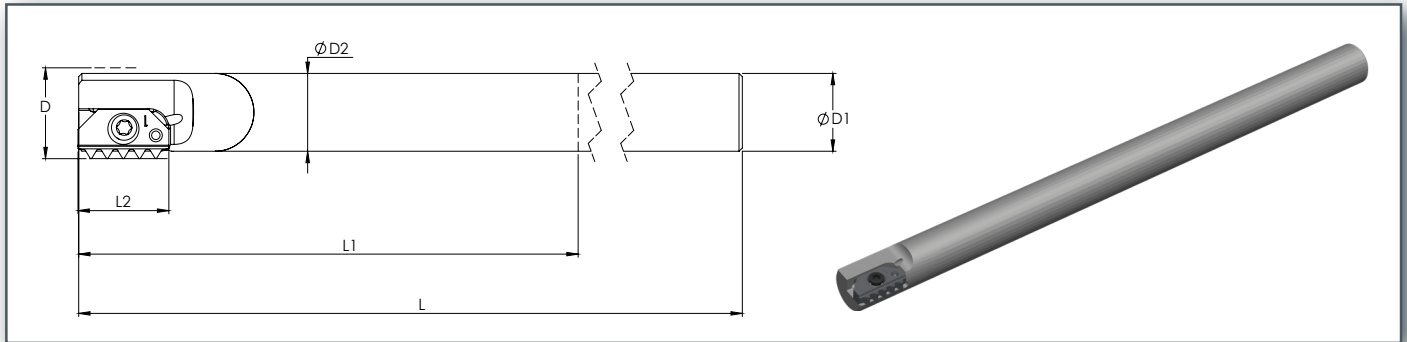


INSERT SIZE	TOOLHOLDER DESCRIPTION	DIMENSIONS mm						SPARES	
		D	D1	D2	L	L1	L2	SCREW	TORQ KEY
PTM14	TIMRC1013C-L77-14-1	13.70	10	10	110	77	14	IN14S	T8
	TIMRC1013C-L120-14-1	13.70	10	10	155	120	14	IN14S	T8
	TIMRC1215C-L132-14-1	15.20	12	12	175	132	14	IN14S	T8
PTM21	TIMRC1621C-L86-21-1	21.00	16	16	130	86	21	IN21	T15
	TIMRC1621C-L157-21-1	21.00	16	16	200	157	21	IN21	T15

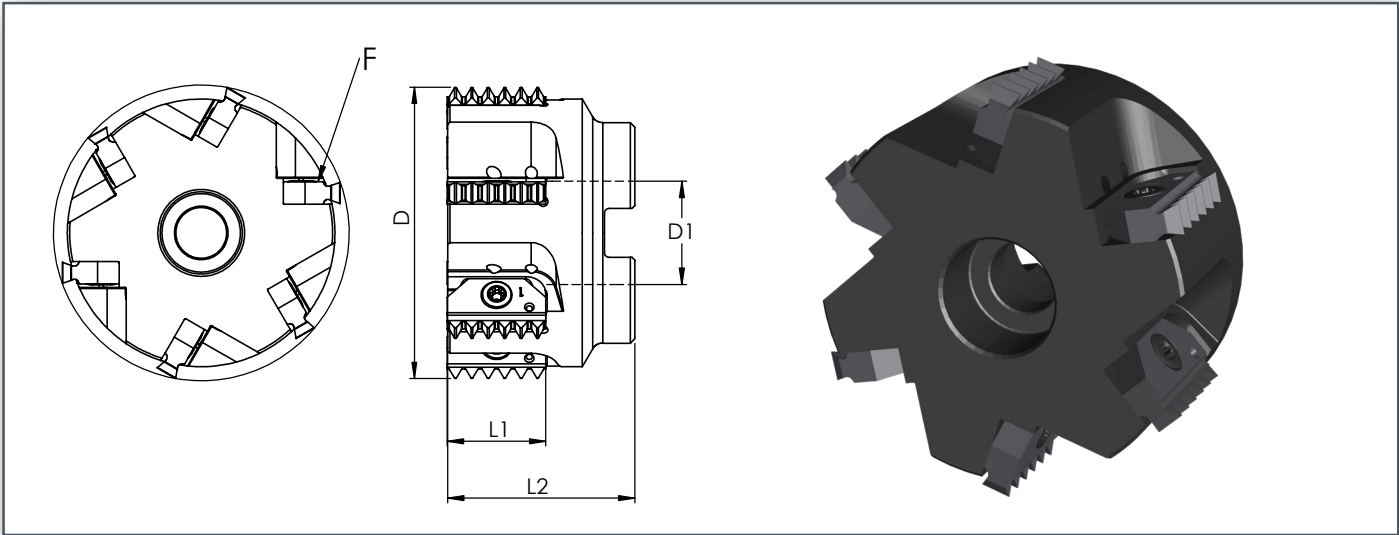

INSERT SIZE	TOOLHOLDER DESCRIPTION	DIMENSIONS mm				FLUTES	SPARES	
		D	D1	L1	L2	F	SCREW	TORQ KEY
PTM21	TIMRS-D63-22-21-6	63	22	21	40	6	IN21	T15

PSR

DOUBLE INSERT

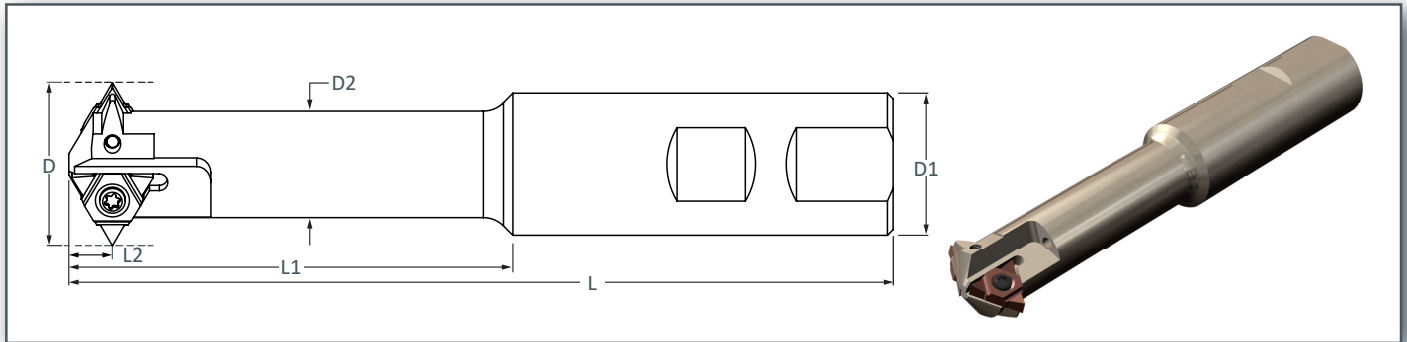

INSERT SIZE	TOOLHOLDER DESCRIPTION	DIMENSIONS mm						SPARES	
		D	D1	D2	L	L1	L2	SCREW	TORQ KEY
11NU	PSR0020 50 19 2 T11NU	19.05	20.00	12.50	125.00	50.00	4.50	S11	T9
16NU	PSR0025 75 29 2 T16U	28.60	25.00	18.75	145.00	75.00	6.70	S16	T10
22NU	PSR0032 100 36 2 T22U	36.00	32.00	25.00	175.00	100.00	8.95	S22	T15

RECOMMENDED CUTTING SPEEDS
PTP

INDEXABLE PTM

MATERIAL GROUP	MATERIAL		HARDNESS	CUTTING SPEED (m/min)	FEED (mm/tooth)
P	UNALLOYED STEEL	LOW CARBON (C = 0.1 - 0.25%)	125	100-210	0.05-0.3
		MEDIUM CARBON (C = 0.25 - 0.55%)	150	100-180	0.05-0.25
		HIGH CARBON (C = 0.55 - 0.85%)	170	100-170	0.05-0.2
	LOW ALLOY STEEL (ALLOYING ELEMENTS ≤5%)	NON HARDENED	180	90-160	0.05-0.25
		HARDENED	275	80-180	0.05-0.2
		HARDENED	350	70-140	0.05-0.15
	HIGH ALLOY STEEL (ALLOYING ELEMENTS >5%)	ANNEALED	200	60-130	0.05-0.2
		HARDENED	325	70-110	0.05-0.1
	CAST STEEL	LOW ALLOY (ALLOYING ELEMENTS <5%)	200	100-170	0.05-0.15
		HIGH ALLOY (ALLOYING ELEMENTS >5%)	225	70-120	0.05-0.1
M	STAINLESS STEEL FERRITIC	NON HARDENED	200	100-170	0.05-0.15
		HARDENED	330	100-170	0.05-0.1
	STAINLESS STEEL AUSTENITIC	AUSTENITIC	180	70-140	0.05-0.15
		SUPER AUSTENITIC	200	70-140	0.05-0.1
	STAINLESS STEEL CAST FERRITIC	NON HARDENED	200	70-140	0.05-0.15
		HARDENED	330	70-140	0.05-0.1
	STAINLESS STEEL CAST AUSTENITIC	AUSTENITIC	200	70-120	0.05-0.15
		HARDENED	330	70-120	0.05-0.1
K	MALLEABLE CAST IRON	FERRITIC (SHORT CHIPS)	130	60-130	0.02-0.8
		PEARLITIC (LONG CHIPS)	230	60-120	0.02-0.05
	GREY CAST IRON	LOW TENSILE STRENGTH	180	60-130	0.05-0.15
		HIGH TENSILE STRENGTH	260	60-120	0.05-0.1
	NODULAR SG IRON	FERRITIC	160	60-100	0.05-0.15
		PEARLITIC	260	60-125	0.05-0.1
N	ALUMINIUM ALLOYS WROUGHT	NON AGING	60	100-250	0.1-0.4
		AGED	100	100-180	0.1-0.3
	ALUMINIUM ALLOYS	CAST	75	150-400	0.1-0.3
		CAST AGED	90	150-280	0.05-0.25
		CAST Si 13-22%	130	80-150	0.1-0.3
	COPPER & COPPER ALLOYS	BRASS	90	120-210	0.1-0.3
		BRONZE & NON LEADED COPPER	100	120-210	0.05-0.25
	S	HIGH TEMPERATURE ALLOYS	ANNEALED (IRON BASED)	200	20-45
AGED (IRON BASED)			280	20-30	0.02-0.05
ANNEALED (NICKLE OR COBALT BASED)			250	20-50	0.02-0.05
AGED (NICKEL OR COBALT BASED)			350	10-15	0.02-0.05
TITANIUM ALLOYS		PURE 99.5 Ti	400Rm	70-140	0.02-0.05
		a + β ALLOYS	1050Rm	20-50	0.02-0.05
H	EXTRA HARD STEEL	HARDENED & TEMPERED	45-50HRc	20-45	0.01-0.03
			51-55HRc	20-45	0.01-0.02

RECOMMENDED CUTTING SPEEDS

PTC2

TM SOLID

MATERIAL GROUP	MATERIAL		HARDNESS	CUTTING SPEEDS (m/min)			FEED (mm/tooth)			
				HELICAL DEEP THREADING STRAIGHT THRU-COOLANT	PIXIMILLS	HELICAL	STRAIGHT	DEEP THREADING	THRU COOLANT	PIXIMILLS
P	UNALLOYED STEEL	LOW CARBON (C = 0.1 - 0.25%)	125	50-180	60-120	0.03-0.08	0.03-0.08	0.10-0.35	0.03-0.08	0.02-0.16
		MEDIUM CARBON (C = 0.25 - 0.55%)	150	50-140	60-120	0.03-0.08	0.03-0.08	0.08-0.30	0.03-0.08	0.02-0.16
		HIGH CARBON (C = 0.55 - 0.85%)	170	50-120	60-90	0.03-0.08	0.03-0.06	0.08-0.30	0.03-0.08	0.02-0.16
	LOW ALLOY STEEL (ALLOYING ELEMENTS ≤5%)	NON HARDENED	180	60-170	60-90	0.03-0.08	0.03-0.07	0.08-0.30	0.03-0.08	0.02-0.16
		HARDENED	275	60-160	50-80	0.03-0.07	0.03-0.07	0.08-0.30	0.03-0.07	0.02-0.07
		HARDENED	350	60-150	50-80	0.02-0.05	0.02-0.04	0.05-0.15	0.02-0.06	0.02-0.03
	HIGH ALLOY STEEL (ALLOYING ELEMENTS >5%)	ANNEALED	200	40-90	50-80	0.03-0.07	0.03-0.07	0.10-0.24	0.03-0.07	0.02-0.09
		HARDENED	325	30-70	50-80	0.02-0.04	0.02-0.05	0.05-0.15	0.03-0.06	0.02-0.03
	CAST STEEL	LOW ALLOY (ALLOYING ELEMENTS <5%)	200	70-200	70-90	0.03-0.08	0.03-0.06	0.08-0.30	0.03-0.07	0.02-0.16
		HIGH ALLOY (ALLOYING ELEMENTS >5%)	225	60-150	60-80	0.03-0.05	0.03-0.06	0.05-0.15	0.03-0.07	0.02-0.03
M	STAINLESS STEEL FERRITIC	NON HARDENED	200	50-140	60-90	0.04-0.07	0.02-0.05	0.11-0.35	0.03-0.08	0.02-0.16
		HARDENED	330	50-110	50-80	0.02-0.06	0.01-0.03	0.05-0.24	0.03-0.06	0.02-0.03
	STAINLESS STEEL AUSTENITIC	AUSTENITIC	180	60-130	60-90	0.03-0.08	0.02-0.05	0.11-0.35	0.03-0.08	0.02-0.16
		SUPER AUSTENITIC	200	50-120	50-80	0.03-0.08	0.02-0.05	0.11-0.35	0.03-0.06	0.02-0.16
	STAINLESS STEEL CAST FERRITIC	NON HARDENED	200	50-150	60-90	0.03-0.08	0.02-0.05	0.11-0.35	0.03-0.06	0.02-0.16
		HARDENED	330	50-100	50-80	0.02-0.05	0.02-0.03	0.10-0.24	0.02-0.05	0.02-0.03
	STAINLESS STEEL CAST AUSTENITIC	AUSTENITIC	200	50-140	60-90	0.03-0.08	0.02-0.06	0.11-0.35	0.02-0.05	0.02-0.16
		HARDENED	330	50-90	50-80	0.02-0.05	0.01-0.03	0.10-0.24	0.02-0.04	0.02-0.03
K	MALLEABLE CAST IRON	FERRITIC (SHORT CHIPS)	130	60-150	50-80	0.03-0.08	0.03-0.08	0.05-0.15	0.03-0.08	0.02-0.03
		PEARLITIC (LONG CHIPS)	230	80-100	60-90	0.03-0.08	0.03-0.06	0.10-0.24	0.03-0.07	0.02-0.12
	GREY CAST IRON	LOW TENSILE STRENGTH	180	50-140	70-100	0.03-0.08	0.03-0.06	0.09-0.25	0.03-0.07	0.02-0.16
		HIGH TENSILE STRENGTH	260	40-110	60-90	0.02-0.06	0.02-0.05	0.10-0.24	0.03-0.07	0.02-0.12
	NODULAR SG IRON	FERRITIC	160	40-100	70-100	0.03-0.08	0.03-0.07	0.09-0.25	0.03-0.08	0.02-0.16
		PEARLITIC	260	40-90	60-90	0.02-0.06	0.02-0.05	0.02-0.05	0.03-0.07	0.02-0.12
N	ALUMINIUM ALLOYS WROUGHT	NON AGING	60	150-250	60-250	0.05-0.12	0.05-0.15	0.12-0.40	0.04-0.1	0.03-0.15
		AGED	100	100-220	60-150	0.05-0.12	0.03-0.1	0.10-0.32	0.03-0.1	0.03-0.16
	ALUMINIUM ALLOYS	CAST	75	80-150	60-250	0.05-0.12	0.05-0.15	0.10-0.32	0.03-0.1	0.03-0.16
		CAST AGED	90	90-160	60-150	0.05-0.12	0.03-0.1	0.10-0.30	0.06-0.12	0.02-0.16
		CAST Si 13-22%	130	150-250	250	0.05-0.12	0.05-0.15	0.10-0.32	0.05-0.12	0.03-0.15
	COPPER & COPPER ALLOYS	BRASS	90	150-250	60-250	0.06-0.13	0.05-0.15	0.12-0.40	0.05-0.12	0.03-0.16
		BRONZE & NON LEADED COPPER	100	100-220	60-150	0.05-0.12	0.03-0.1	0.10-0.32	0.05-0.12	0.03-0.15
S	HIGH TEMPERATURE ALLOYS	ANNEALED (IRON BASED)	200	30-50	60	0.03-0.07	0.02-0.04	0.11-0.35	0.03-0.7	0.02-0.16
		AGED (IRON BASED)	280	20-40	50	0.02-0.04	0.01-0.03	0.05-0.15	0.03-0.06	0.02-0.03
		ANNEALED (NICKLE OR COBALT BASED)	250	15-30	35	0.02-0.04	0.01-0.03	0.05-0.15	0.03-0.06	0.02-0.03
		AGED (NICKEL OR COBALT BASED)	350	15-25	30	0.02-0.04	0.01-0.03	0.05-0.15	0.02-0.05	0.02-0.03
	TITANIUM ALLOYS	PURE 99.5 Ti	400Rm	30-70	30-50	0.02-0.04	0.01-0.03	0.10-0.24	0.02-0.05	0.02-0.07
		a + β ALLOYS	1050Rm	20-45	25-35	0.02-0.04	0.01-0.02	0.10-0.24	0.02-0.04	0.02-0.07
H	EXTRA HARD STEEL	HARDENED & TEMPERED	45-50HRc	15-35	45	0.02-0.03	0.02	0.03-0.06	0.02-0.03	-
			51-55HRc	15-30	30	0.02-0.03	0.01	0.03-0.06	0.02-0.03	-


RECOMMENDED CUTTING SPEEDS

PTC2


PIXIMILLHD

FEED (mm/tooth) BY CUTTING DIA. = D2


MATERIAL GROUP	MATERIAL		HARDNESS HB	SPEED (m/min)	1.5-2.5	2.5-5	5-7	7-9	9-11
P	LOW ALLOY STEEL (ALLOYING ELEMENTS ≤5%)	HARDENED	350	25-160	0.04	0.05	0.06	0.07	0.08
	HIGH ALLOY STEEL (ALLOYING ELEMENTS >5%)	HARDENED	325	25-180					
M	STAINLESS STEEL FERRITIC	HARDENED	330	25-120	0.04	0.05	0.06	0.07	0.08
	STAINLESS STEEL CAST FERRITIC	HARDENED	330	25-110					
	STAINLESS STEEL CAST AUSTENITIC	HARDENED	330	25-100					
K	MALLEABLE CAST IRON	FERRITIC (SHORT CHIPS)	130	25-160	0.05	0.06	0.07	0.08	0.1
		PEARLITIC (LONG CHIPS)	230	25-150	0.04	0.05	0.06	0.07	0.08
	GREY CAST IRON	LOW TENSILE STRENGTH	180	25-130	0.05	0.06	0.07	0.08	0.1
		HIGH TENSILE STRENGTH	260	25-100	0.04	0.05	0.06	0.07	0.09
	NODULAR SG IRON	FERRITIC	160	25-125	0.04	0.05	0.06	0.07	0.09
		PEARLITIC	260	25-90	0.03	0.04	0.05	0.06	0.07
S	HIGH TEMPERATURE ALLOYS	ANNEALED (NICKEL OR COBALT BASED)	250	15-35	0.03	0.04	0.05	0.06	0.07
		AGED (NICKEL OR COBALT BASED)	350	15-30					
	TITANIUM ALLOYS	PURE 99.5 TI	400Rm	25-70					
		α + β ALLOYS	1050Rm	25-50					
H	EXTRA HARD STEEL	HARDENED & TEMPERED	45-50HRC	25-70	0.04	0.05	0.06	0.07	0.08
			51-55HRC	25-60	0.03	0.04	0.05	0.06	0.07
			56-62HRC	25-50	0.02	0.03	0.04	0.05	0.06

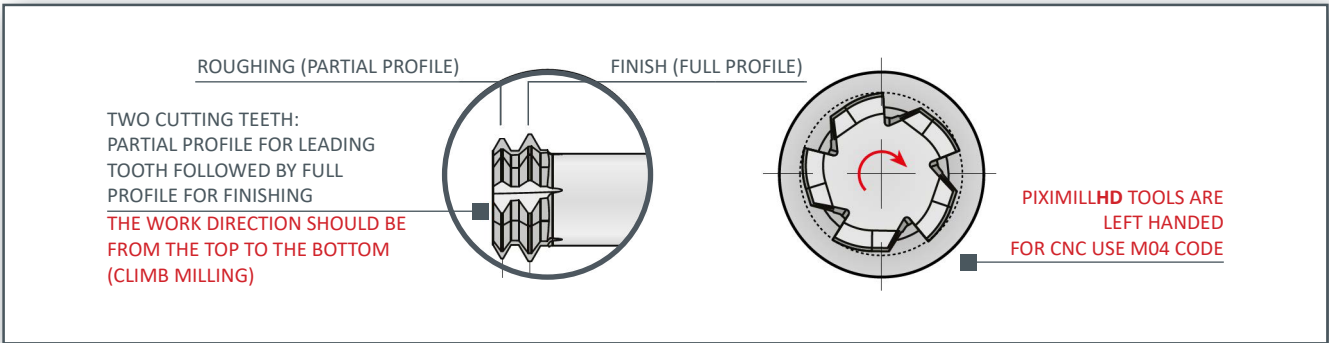


TMDNTHRILLER OPERATING CYCLE

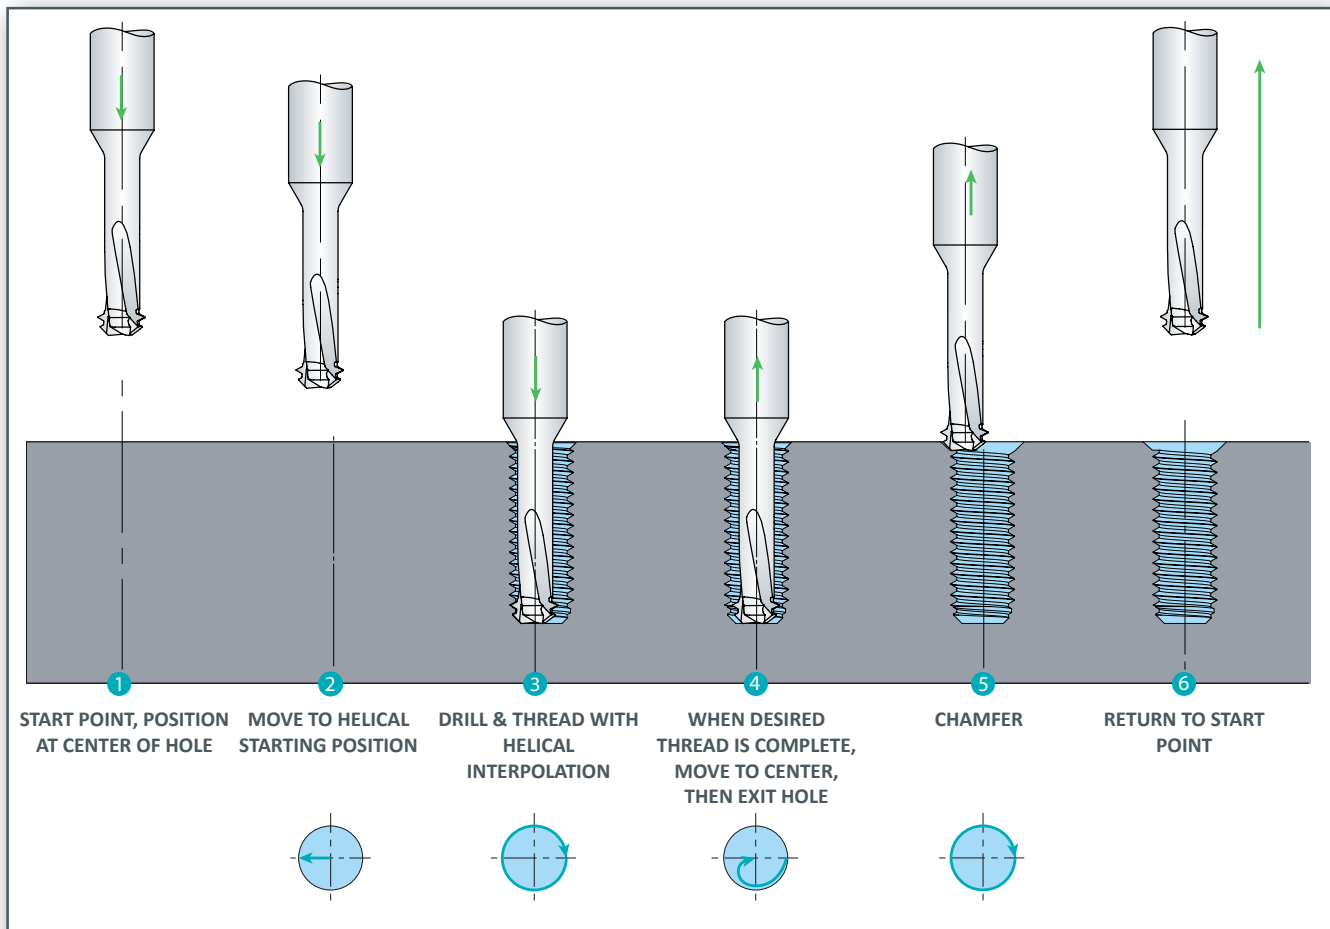

TMDNTHRILLER COOLANT USE FOR BEST CHIP EVACUATION

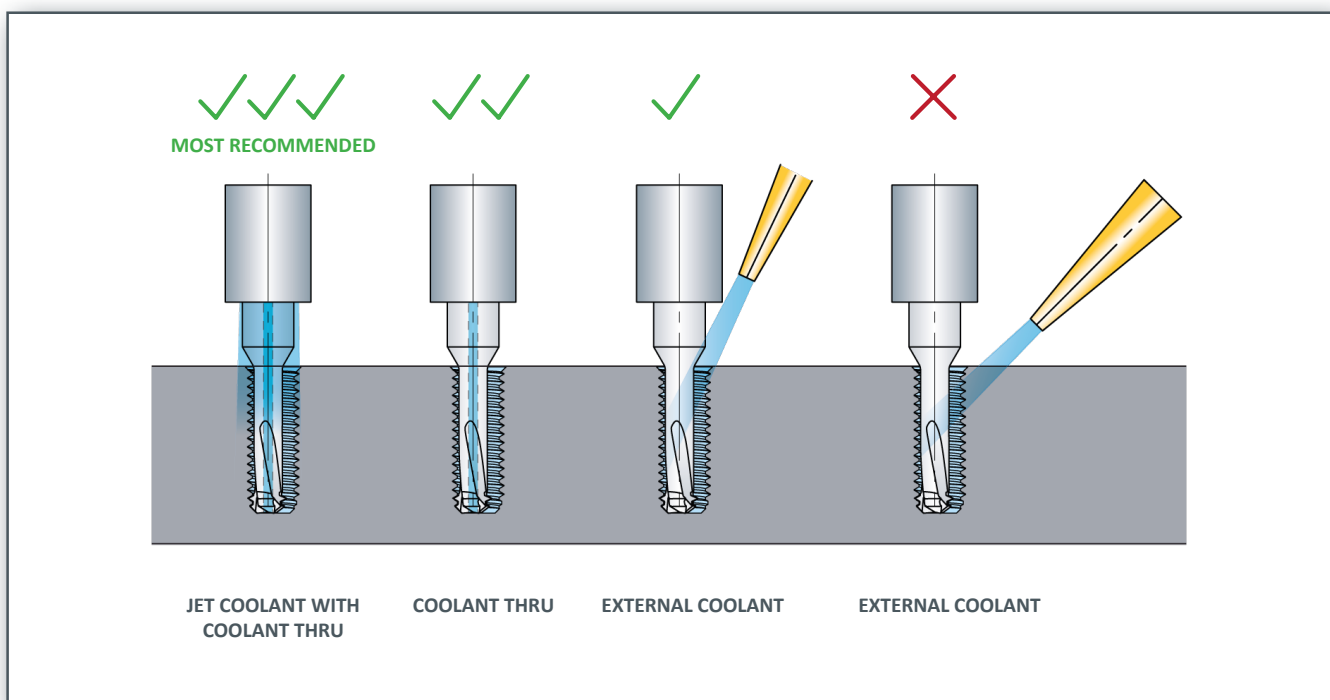

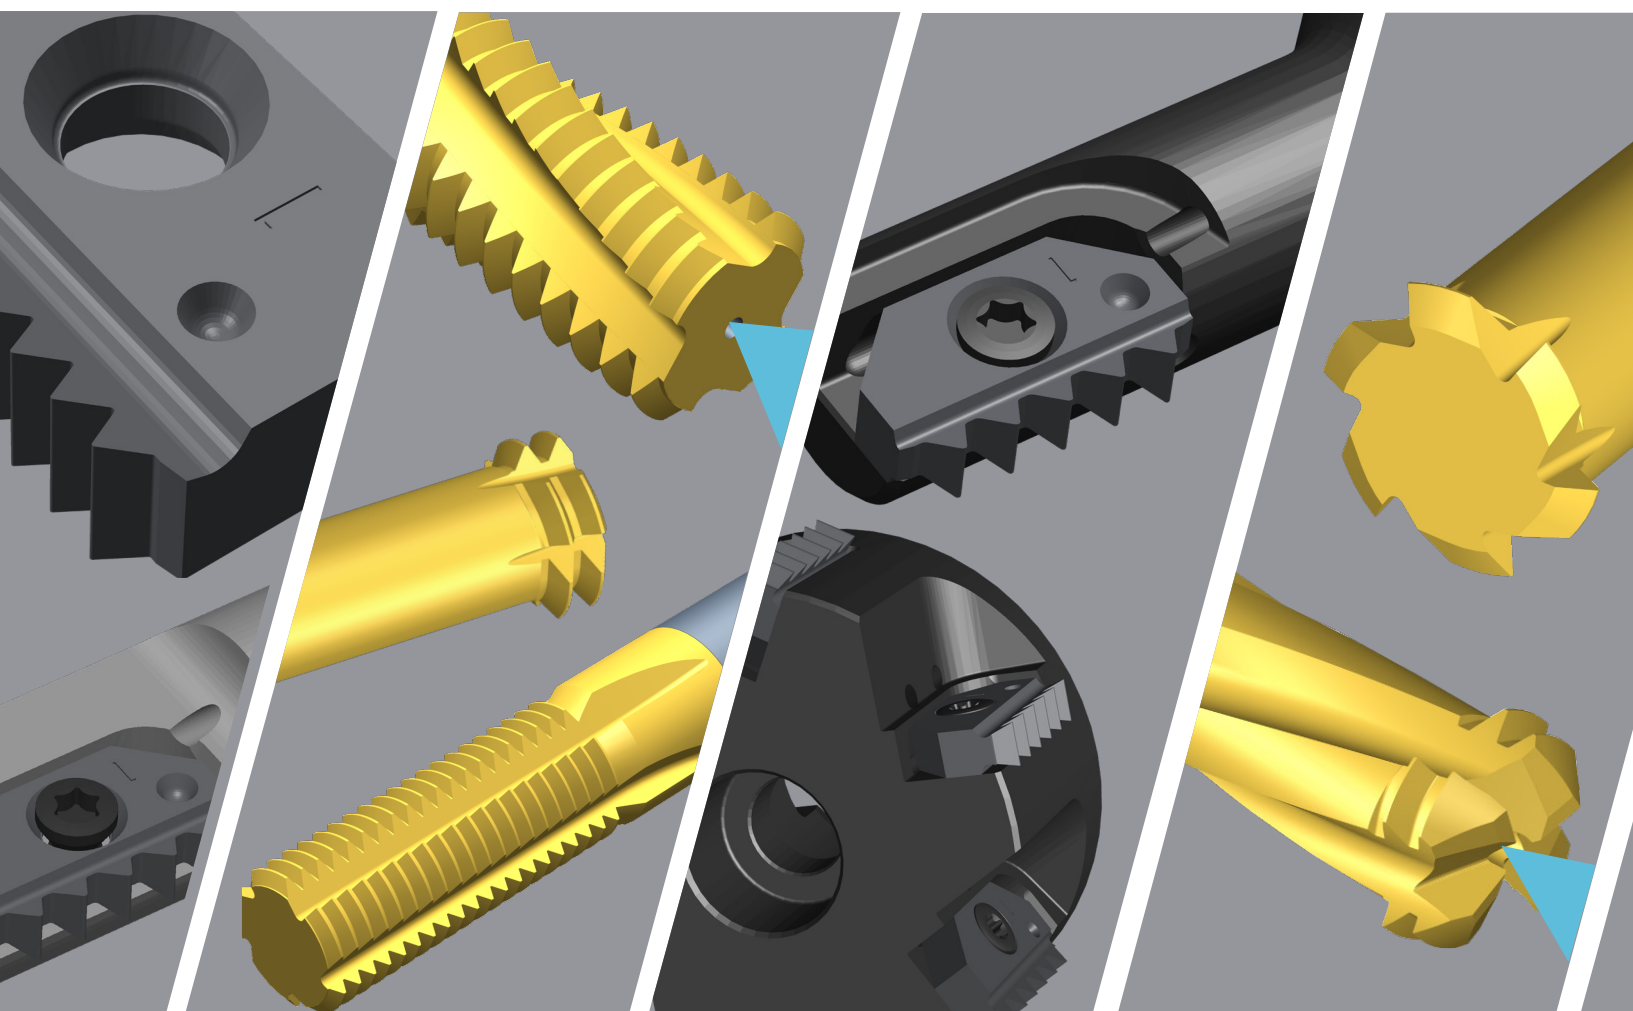

POSITHREAD

POSITHREAD UK 4-5 BRIDGEWATER ROAD HERTBURN INDUSTRIAL ESTATE WASHINGTON TYNE & WEAR NE37 2SG ENGLAND
t: +44 (0)191 417 8178 e: sales@posithread.co.uk w: www.posithread.co.uk